

1.5 to 6 Ton Vertical Self-Contained Packaged Wall Mount Air Conditioners

Models MAA1018A - MAA1060A & MGA1072A (Single Stage Cooling)

MAA2024A - MAA2060A (2-Stage) & MAA2060A - MAA2072A & MGA2072A (2-Stage & Reverse Flow)



General Description

Used to cool electronic and communication equipment shelters, modular buildings, classrooms and a variety of commercial/industrial structures, Marvair® wall mount air conditioners are versatile problem solvers for a wide range of conditions and applications. Due to the high internal heat load in applications such as electronic equipment shelters, cooling is required even when outside temperatures drop below 60°F (15°C). Marvair air conditioners have the necessary controls and components for operation during these (less than 60°F [15°C]) temperatures. All models use the non-ozone depleting R-410A refrigerant.

All Marvair wall mount air conditioners are available with an optional factory installed economizer. When ambient conditions are cool and dry, the economizer uses outside air to cool the shelter. The economizer provides temperature control, energy cost savings, and increased reliability by decreasing the operating hours of the compressor and the condenser fan. To insure proper operation and optimum performance, all economizers are non-removable, factory installed and tested. In addition, factory and field installed accessories can be used to meet specific requirements.

► High Efficiency Models

Marvair's energy efficient wall mount air conditioners meet or exceed the US Department of Energy's Btu/h efficiency levels of 11 EER for units less than 65,000 BTU/h cooling capacity and 10 EER for units larger than 65,000 BTU/h. Electronically commutated indoor fan motors combined with highly efficient scroll compressors result in these higher Energy Efficiency Ratios (EER's).



MAA1036AA



Features and Benefits

Built-In Energy Savings

- *Optional Factory Installed Economizer*
- *Four Model Lines to Meet Any Budget and Efficiency Requirements*
- *Available EER of up to 11.50*

R-410A Refrigerant

- *Efficient Heat Release*
- *Non-Ozone Depleting Refrigerant*
- *Synthetic Lubricant*
- *Reduced Compressor Wear*

High Efficiency and Reliability

- *High Efficiency Compressor and Lanced Coil Fins*
- *High Pressure Switch Protection*
- *Liquid Line Temperature Monitoring & Control*
- *Suction Line Temperature monitoring & Control*

Ease of Installation and Service

- *Side Access Panels for Power Connections*
- *Built-In Mounting Flanges and Internal Disconnect*
- *Standard Access Valves and Filters, Status LEDs*

Safety Listed and Energy Certified

All Marvair air conditioners are built to UL standard 1995, 4th edition and CAN/CSA C22.2, No. 236-11 Ed.4. For energy efficiency and performance, the units are tested and rated in accordance to the ANSI/ARI (Air-Conditioning and Refrigeration Institute) Standard 390- 2003 (Single Package Vertical Units). All units meet or exceed the efficiency requirements of ANSI/ASHRAE/IESNA 90.1.2016. Marvair air conditioners are commercial units and are not intended for use in residential applications.

Standard Features

➤ Designed for Operation in Low Ambient Conditions

- Low ambient control cycles condenser fan to maintain proper refrigerant pressures. Allows operation in mechanical cooling (compressor) of our standard air conditioners down to 20°F (-7°C). With the Extreme Duty option, the units will operate down to 0°F (-18°C). Note: low temperature operation is affected by ambient conditions, e.g. wind and humidity.
- Three minute by-pass of the low pressure sensor for start-up of compressor when outdoor temperatures are below 55°F (13°C).
- Optional economizer.

➤ Designed for Operation on Generator Power

- All Marvair single & three phase air conditioners are designed to operate on Generator Power. See *Summary Electrical Ratings* for your specific model

➤ High Efficiency

- High efficiency compressor.
- Lanced fins standard on all evaporator and condenser coils.

➤ Remote Alarm Capability

- Dry contacts can be used for remote alarm or notification upon air conditioner lockout.

➤ Built-in Reliability

- High pressure switch and low pressure sensor with lockout protects refrigerant circuit.
- Built in 3-minute delay on break anti-short cycle protection.

➤ Ease of Service

- Service access valves are standard.
- Standard 2" (50 mm) pleated filter with a MERV rating of 8 changeable from outside.
- All major components are readily accessible.
- Front Control Panel allows easy access and complies with NEC clearance codes on redundant side-by-side systems.
- LEDs indicate operational status and fault conditions.
- Foil backed insulation on the indoor air path.
- A minimum position potentiometer that can be adjusted to prevent the economizer damper from closing completely. This control ensures that whenever the evaporator fan is operating, fresh air is being introduced into the building.

➤ Thermal Expansion Valve

- Improves performance in hot ambient temperatures. Optional on MGA1072 models.

➤ Rugged Construction

- Copper tube, aluminum fin evaporator & condenser coils.
- Field or factory installed heaters on discharge side of evaporator coil (optional)
- Baked on neutral beige finish over galvanneal steel for maximum cabinet life. (Other finishes are available.)
- A sealed condenser fan motor resists sand and corrosion.

➤ Ease of Installation

- Sloped top with flashing eliminates need of rainhood.
- Built-in mounting flanges facilitate installation and minimize chance of water leaks.
- Supply and return openings exactly match previous models.
- Factory installed disconnect.
- Single Point Power Entry complies with latest edition of U.L. Standard 1995.
- Side access panels on economizer models for easy access to electrical connections.
- Phase monitor on all 3-Phase units to continuously measures the voltage of each of the three phases. Separate sensing of low/high voltage, voltage imbalance including phase loss and phase reversal.

A Marvair® First – Factory Installed Economizer


Marvair's wall mount air conditioners have been the industry standard since their introduction in 1986. Tens of thousands of Marvair air conditioners are in operation from the metropolitan areas of North America to the deserts of the Mid-East to the Siberian tundra. Here's how the economizer works:

On a signal from the wall mounted indoor thermostat that cooling is required, either mechanical cooling with the compressor or free cooling with the optional economizer is provided. A factory installed enthalpy controller determines whether the outside air is sufficiently cool and dry to be used for cooling. If suitable, the compressor is locked out and the economizer damper opens to bring in outside air. Integral pressure relief allows the interior air to exit the shelter, permitting outside air to enter the shelter. The temperature at which the economizer opens is adjustable from 63°F (17°C) at 50% Relative Humidity to 73°F (23°C) at 50% Relative Humidity.

After the enthalpy control has activated and outside air is being brought into the building, the mixed air sensor measures the temperature of the air entering the indoor blower and then modulates the economizer damper to mix the right proportion of cool outside air with warm indoor air to maintain 50-63°F (10 - 17°C) air being delivered to the building. This prevents shocking the electronic components with cold outside air. The compressor is not permitted to operate when the economizer is functioning.

If the outside air becomes too hot or humid, the economizer damper closes completely, or to a field selectable minimum open position, and mechanical cooling is activated.

In all Marvair air conditioners, the supply air flow in the economizer mode is the same or greater than the rated air flow. (The rated air flow is the AHRI certified air flow when the unit is in mechanical cooling.) The “full flow” economizer reduces electrical costs by maximizing the use of outside air for cooling.

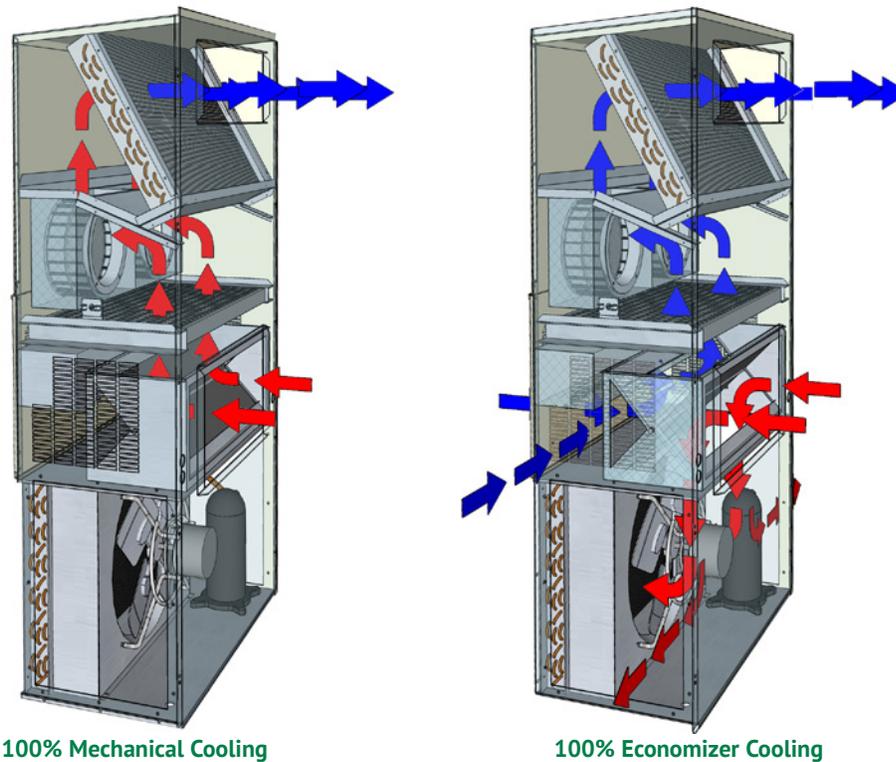

*Artists rendering may vary from actual production units.

Savings with an Economizer

The following table shows the annual electrical cost of cooling a 10 ft. x 20 ft. x 9 ft. (3m x 6m x 2.7m) shelter in twelve cities in the US. Costs are shown for an air conditioner without an economizer, for an air conditioner with an economizer and the savings. The savings do not include any demand charges. The savings are based on the electrical usage of a five ton air conditioner and an electric rate of \$.11 per kilowatt-hour, the approximate average commercial rate in the US.

Hours of Operation	Atlanta, GA	Boston, MA	Chicago, IL	Dallas, TX	Denver, CO	Houston, TX
Annual Compressor & Condenser Motor Run Time without Economizer (Hrs.)	6,176	6,016	6,018	6,282	6,022	6,299
Annual Compressor & Condenser Motor Run Time with Economizer (Hrs.)	3,456	1,947	2,106	4,062	1,930	4,495
Run Time Savings with the Economizer (Hrs.)	2,720	4,069	3,912	2,220	4,092	1,804
Annual Costs Saving (\$) of 11.0 EER unit with an Economizer						
Annual Operating Cost 11.0 EER Unit without Economizer (\$)	\$3,150	\$3,068	\$3,069	\$3,204	\$3,072	\$3,212
Annual Operating Cost 11.0 EER with Economizer	\$2,071	\$1,459	\$1,525	\$2,323	\$1,454	\$2,496
Annual Savings using 11.0 EER Unit with Economizer	\$1,079	\$1,609	\$1,544	\$881	\$1,454	\$716

Hours of Operation	Los Angeles, CA	Miami, FL	Phoenix, AZ	Pittsburgh, PA	Seattle, WA	St. Louis, MO
Annual Compressor & Condenser Motor Run Time without Economizer (Hrs.)	6,105	6,434	6,473	6,026	5,999	6,120
Annual Compressor & Condenser Motor Run Time with Economizer (Hrs.)	3,121	6,062	4,799	2,172	1,093	2,896
Run Time Savings with the Economizer (Hrs.)	2,984	372	1,674	3,854	4,906	3,224
Annual Costs Saving (\$) of 11.0 EER unit with an Economizer						
Annual Operating Cost 11.0 EER Unit without Economizer (\$)	\$3,114	\$3,282	\$3,302	\$3,073	\$3,060	\$3,122
Annual Operating Cost 11.0 EER with Economizer	\$1,926	\$3,133	\$2,636	\$1,550	\$1,114	\$1,846
Annual Savings using 11.0 EER Unit with Economizer	\$1,188	\$148	\$666	\$1,523	\$1,946	\$1,275

Shelter Metrics:

- 10' x 20' x 9' building
- Internal heat gain (electronics load): 12,000 watts.
- Building surface area (excluding floor area): 740 ft²
- R-Value of walls and ceiling: R-12
- Internal shelter temperature (Thermostat set point): 75°F

Air Conditioner Metrics:

- Economizer setting: 63°F (dry bulb or enthalpy sensor)
- A/C unit capacity: 60,000 BTUH (5 tons) with 1-stage compressor
- Nominal EER (unit efficiency): 11.0
- Cost of power: \$.11 per KWH

Options for Outside Air for Ventilation

ASHRAE standard 62 requires 30 cfm of outside air per occupant of a classroom. To meet this requirement, Marvair offers ventilation packages for every budget and requirement.

► Configuration “C”: Up to 100% Modulating Economizer

The economizer reduces the cost of air conditioning by using outside air when acceptable to cool the room (Free Cooling). The factory installed Marvair® economizer has integral pressure relief.

Control Board Logic: Upon a “Call for Cooling”, the economizer control board calculates whether the HVAC operates in economizer mode or mechanical cooling mode based on outdoor temperature (dry bulb) or temperature/humidity (enthalpy). When outdoor conditions are favorable for economizer cooling, the damper drives open and modulates to maintain a 55°F mixed air temperature through the supply grille. When outdoor conditions are not favorable for economizer cooling, the economizer damper remains closed, and the HVAC unit will operate in mechanical cooling mode.

Features Designed for Telecommunication applications:

Hydrogen Fault Input: When 24VAC is applied to the H_FLT input, the economizer board forces the damper to open 100% for emergency ventilation. The compressor does not operate during Hydrogen Fault/Emergency Ventilation. Thermostat must provide the fan “G” signal to HVAC to activate the indoor blower.

Forced Mechanical Cooling: When 24VAC is applied to the FC input of the economizer board, the economizer damper is forced closed, and the HVAC will operate in mechanical cooling mode. This is considered as economizer override in the event economizer cooling is not sufficient for the heat load. Thermostat must provide the fan “G” signal to HVAC to activate the indoor blower.

Economizer Status: The economizer board has contacts that when used with the Marvair CommStat 4 Telecom HVAC Controller, change state to provide feedback to the CommStat 4 to indicate when the HVAC is in economizer mode versus mechanical cooling mode. This feedback allows the CommStat 4 to initiate the forced cooling feature to override economizer cooling and force mechanical cooling.

When used with minimum position potentiometer (optional), the Marvair® economizer can meet requirements of ASHRAE Std. 62.

► Configuration “D”: Two-Position Motorized Fresh Air Damper w/Pressure Relief Ventilation

Factory Installed Relay Logic: Upon a “Call for indoor blower” via a 24V signal (G), the motorized damper opens to a maximum of 50% of the fully open position. The open position can be decreased from 50% by adjusting the rod position on the drive linkage. In this case, the damper will not open unless there’s a call for the indoor blower.

Note: This circuit does not interrupt the compressor or heater operation.

► Configuration “E”: Two-Position Motorized Fresh Air Damper w/Pressure Relief Ventilation & Independent Control

Factory Installed Relay Logic: Upon a “Call for Motorized damper” via a 24V signal from an external user-installed device, the motorized damper opens to a maximum of 50% of the fully open position. The open position can be decreased from 50% by adjusting the rod position on the drive linkage.

The motorized damper Does NOT open when there is a call for the indoor fan (G). A 24VAC signal {sourced from LVTB pin 10 and supplied through a user-provided Normally Open (NO) contact} activates (opens) the Motorized Damper and connected Relief Damper. When the 24VAC signal is removed, the Motorized Damper and connected Relief Damper close (spring return).

Note: This circuit does not interrupt the compressor or heater operation.

► Configuration “F”: No Free Cooling, 100%- Damper Opening, Emergency Ventilation Only w/Pressure Relief and Independent Control

Factory Installed Relay Logic: Upon a “Call for emergency ventilation”, from an external user-provided device; the motorized damper opens to 100% open position and the indoor blower is forced to operate. During “Emergency Ventilation mode”, the compressor and heater do not operate. The relay has a wire lead extended for the installer to connect their emergency ventilation control signal.

Note: This circuit interrupts the compressor and heater operation and forces the indoor blower and damper to operate during emergency ventilation mode.

► Configuration “N”: Manual Fresh Air Damper (Standard)

Barometric damper capable of up to 15% of the air conditioner’s total rated airflow of outside air; field adjustable, no pressure relief.

Controllers and Thermostats

► Thermostats and Controllers for Single Stage and 2-Stage Air Conditioners

See the *Marvair Thermostats and Controllers Product Data Sheet* for the thermostats and controllers for use with Marvair air conditioners.

Supply/Return Grilles

► Supply Grilles

For MAA1018A - 13" x 5" (330 mm x 125 mm)	P/N 80685
For MAA1020A, MAA1024A, MAA1024A "B2" - 20" x 8" (508 mm x 203 mm)	P/N 80674
For MAA1030A, MAA1030A "B2", MAA1036A, MAA1036A "B2" - 28" x 8" (711 mm x 203 mm)	P/N 80675
For MAA1042A, MAA1048A MAA1060A - 30" x 10" (762 mm x 254 mm)	P/N 80676
For MAA2060A, MGA1072A & MGA2072A Reverse Flow - 30" x 16" (762 mm x 406 mm)	P/N 93197
For MGA1072 - 30" x 10" (762 mm x 254 mm)	P/N 80676

► Return Grilles

For MAA1020A, MAA1024A, MAA2024A & MAA1024A "B2" - 20" x 12" (508 mm x 305 mm)	P/N 80677
For MAA1030A, MAA1036A, MAA2030A, MAA2036A & MAA1030A "B2", MAA1036A "B2" - 28" x 14" (711 mm x 356 mm)	P/N 80678
For MAA1042A, MAA1048A MAA1060A, MAA2042A, MAA2048A, MAA2060A, MAA2072A- 30" x 16" (762 mm x 406 mm)	P/N 80679
For MAA2060A, MGA1072A & MGA2072A Reverse Flow - 30" x 10" (762 mm x 254 mm)	P/N 93198
For MGA1072 - 30" x 16" (762 mm x 406 mm)	P/N 80679

► Return Filter Grilles

Used when filter must be changed from the interior. Not recommended for economizer equipped air conditioners.

Note: Filter used in Return Filter Grille is 1" (25 mm) thick. Recommended for use with MAA1024A/1030A/1036A "B2".

For MAA1018A - 14" x 12" (356 mm x 305 mm)	P/N 80680
For MAA1020A, MAA1024A, MAA1024A "B2" - 20" x 12" (508 mm x 305 mm)	P/N 80671
1" Replacement Filter	P/N 91983
For MAA1030A, MAA1030A "B2", MAA1036A, MAA1036A "B2" - 28" x 14" (711 mm x 356 mm)	P/N 80672
1" Replacement Filter	P/N 80769
For MAA1042A, MAA1048A, MAA1060A, MAA2042A, MAA2048A, MAA2060A, MAA2072A 30" x 16" (762 mm x 406 mm)	P/N 80673
1" Replacement Filter	P/N 80140

Options

Marvair air conditioners were designed and are built to stringent requirements of the communications/electronic shelter. Applications occur that have special requirements. Numerous options are available to meet these special needs.

► Hard Start Kit

Used on single phase equipment to give the compressor higher starting torque under low voltage conditions. (Field installed only) (Note: Not recommended for use on scroll compressors.)

► Dehumidification

Allows the electric heat to operate simultaneously with cooling. See Dehumidification Application Bulletin for details. Note: The electrical characteristics and requirements of air conditioners with the dehumidification option are different from standard air conditioners. Refer to the appropriate Summary Rating Charts for the electrical characteristics of units with Electric Reheat. Units with reheat require a thermostat and a dehumidistat for proper operation.

► Protective Coating Packages

Coated Coils: Either the condenser or evaporator coil can be coated. For harsh conditions, e.g., power plants, paper mills or sites where the unit will be exposed to salt water, the coils should be coated. **Note:** Cooling capacity may be reduced by up to 5% on units with coated coils.

Coastal Environmental Package: This package includes:

- Corrosion resistant fasteners,
- Sealed or partially sealed condenser fan motor,
- Insitu coating applied to all exposed internal copper and metal in the in the condenser section, and
- A protective coating on the condenser coil.

All Coat Package: Includes the same features as the Coastal Environmental Package and adds an impregnated polyurethane on the evaporator coil and the Insitu coating on all exterior and interior components and sheet metal.

Note 1: The insulated internal sheet metal and the internal control box are not coated.

Note 2: The corrosion prevention coating can not be applied to stainless steel.

► Protective Coil Coatings

The Condenser Coil or the Evaporator Coil or Both can be coated. Coating the Evaporator Coil is not common. For harsh conditions, e.g., power plants, paper mills or sites where the unit will be exposed to salt water, the coils should be protected by a protective coating. **Note:** Cooling capacity may be reduced by up to 5% on units with coated coils.

➤ **External Low Noise Blower (ELNB)**

A field installed kit that consists of a condenser air hood, centrifugal blowers, controls and a compressor jacket to reduce the sound level by up to 6 dbA of Marvair air conditioners. Available for models 2.5 - 5 ton models. See External Low Noise Blower Product Data Sheet for details.

➤ **Wall Mount Air Conditioner Transition Curb**

Economizer equipped models only – A sheet metal curb that enables 3.5, 4 and 5 ton air conditioner to replace an 2.5 or 3 ton unit. Curb transitions supply and return openings of the 3-1/2, 4 and 5 ton units to the smaller openings.

➤ **Hot Gas By-Pass (Non-Economizer Models)**

Non-Economizer Models Only – Used in specialty applications; i.e., Magnetic Resonance Imaging (MRI) buildings, to prevent magnetic voltage disturbance caused by compressor cycling. Hot gas by-pass option packages are available to allow operation to 20°F (-7°C). Please refer to Hot Gas By-pass Application Bulletin for details. Not available on 1.5 and 2 ton models.

➤ **High Filtration**

Selected units are built with larger blowers/motors for use with higher efficiency filters with MERV ratings of 11, 13 and 14 when tested to ASHRAE 52.2. Units with economizers have a prefilter on the outside air. Contact your Marvair representative for specific models.

➤ **Color**

Marvair air conditioners are available in six different cabinet colors -the standard Marvair® beige, white, gray, Carlsbad Canyon (brown), Mesa Tan and pebble gray. The standard cabinet's sides, top and front panels are constructed of 20 gauge painted steel. Contact your Marvair representative for color chips. The cabinet can also be constructed of type 316 stainless steel. Two stainless steel cabinet constructions are available- the complete cabinet, including most internal sheet metal or only the exterior sheet metal. Custom colors are also available; contact Marvair for details.

➤ **Extended Warranty**

A first-year labor (Silver), and a two-year labor (Gold) are available. See www.marvair.com for optional warranty details.

➤ **Dirty Filter Indicator**

A factory installed option that measures the difference in pressure across the internal filter and illuminates a LED when the pressure exceeds the desired difference.

➤ **Compressor Sound Jacket**

To reduce sound of compressor.

➤ **Lockable Disconnect Access Cover Plate**

The access plate to the service disconnect switch can be equipped with a lockable cover.

➤ **Washable Filter**

Spun aluminum construction allows cleaning of filters with water.

➤ **Hot Gas Reheat (HGR)**

A Hot Gas Reheat coil and controls allow the indoor humidity of the controlled environment to be maintained at or below a certain humidity set point. These units do not have the ability to add humidity to the room. Dehumidification is achieved by operating mechanical cooling in conjunction with a hot gas reheat coil.

➤ **Compressor Locations**

Most MAA air conditioners can be built with the compressor on the opposite side to facilitate service access when two units are installed side by side. On 1.5 - 3 ton models, the standard location for the compressor is on the right. On 3.5 - 5 ton models, the standard location for the compressor is on the left side, 6 ton models are in the center.

➤ **Extreme Duty Package**

Allows Marvair® air conditioners to operate in extremely cold and hot ambient conditions. The Extreme Duty Package is always factory installed and is available on all air conditioners. Units without an economizer will operate from 0°F to 131°F (-18°C to 55°C). Economizer equipped units will operate from -40°F to 131°F (-29°C to 55°C).

➤ **Desert Duty Package**

The Desert Duty package is a factory installed package of components and cabinet modifications which permit operation in harsh environments. To prevent sand and dust infiltration, the electrical control box is sealed. A closed loop design on non-economizer units insures that no outside air is introduced into the shelter. **Note:** Units with an economizer may be ordered with the Desert Duty Package. If the air conditioner is required with the Desert Duty Package, sand intrusion into the shelter should be considered. Units without an economizer will operate from 20°F to 131°F (-7°C to 55°C). Economizer equipped units will operate from -40°F to 131°F (-29°C to 55°C).

➤ **Anti-Microbial Light**

A germicidal UV light destroys toxic bacteria, viruses and mold on the indoor air coil.

➤ **Cold Plasma Air Purification Device**

Installed inside the unit, this device neutralizes odors, kills mold, bacteria and viruses. It also helps to control allergens*, asthma*, smoke and airborne particles.

*These statements are based on customer testimonials and have not been evaluated by the FDA.

➤ **MERV 13 Return Air Filters**


Factory installed two inch (51 cm) MERV 13 filters. Ultra high filtration material that removes most airborne mold, spores and dust. Replaces standard MERV 8 return air filters.

Dry Contacts Alarm Outputs

 A dry contact is provided for each HVAC unit to indicate HVAC unit failure to the shelter alarm block. Unit failure is defined as 1) a high pressure lockout or 2) a low pressure lockout. This dry contact is a normally open contact.

Back Panel Adapters for 5 Ton Air Conditioners

These back panel adapters are factory installed on the non-economizer 4 or 5 ton air conditioners and to match the supply and return air openings on Marvair 2 and 3 ton air conditioners. This allows 4 or 5 ton units to be quickly and easily installed. No cutting or sawing of the shelter is required. The 4T2 back panel has supply and return openings that match the openings of 2 ton wall mounted air conditioners. The 4T3 back panel has supply and return openings that match the openings of Marvair's 3 ton air conditioners. In addition to matching the openings of Marvair units, the back panels will also match the openings of other brands.

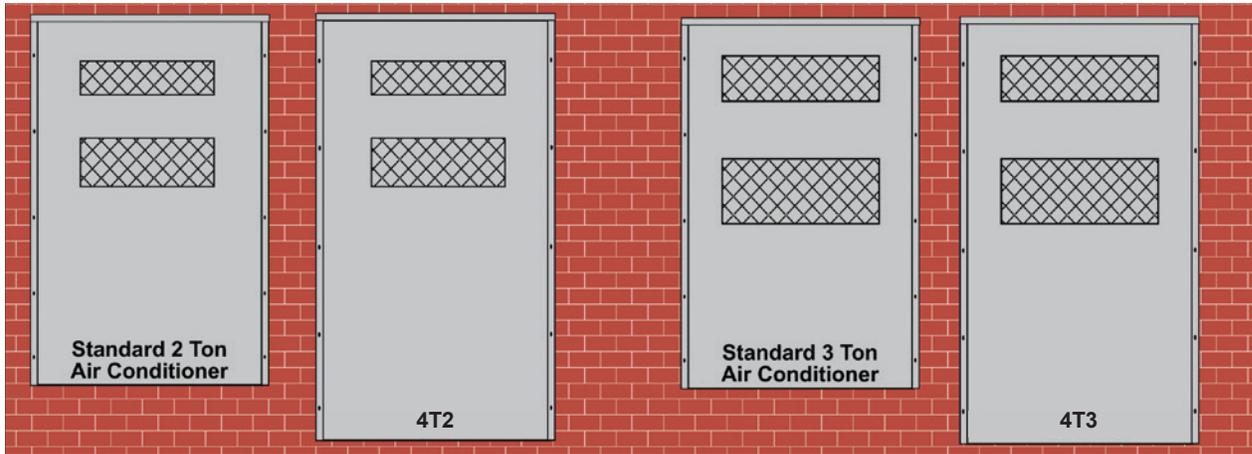


Controls

► Electronic Control Board

The exclusive Printed Circuit Board (PCB) in base model Marvair air conditioners sets the standard for the industry in terms of flexibility, reliability, and performance. This UL certified component is engineered to optimize Heating, Cooling and Dehumidification operation while communicating valuable information to the end user.

Special Features Include:

- Improved HVAC System Reliability (Built In Sequence / Timer Functionality And Simplified Wiring)
- On Board Configuration Menu With Adjustments Of Various Functions and Setpoints
- 2-Stage Compressor Operation
- Independent Indoor Blower Speed Adjustments For 1st Stage Cooling, 2nd Stage Cooling, Electric Heat And Dehumidification (Optimize Latent and Sensible Capacity)
- Built-In Remote Communication (Monitor and Control Via MODBUS Qty. 2 RJ11 Ports)
- Alarm Status and Fault Display(Drastically Reduces Troubleshooting Time and System Downtime)
- Thermocouple Thermistor To Monitor Refrigerant Temperature Of The Low Pressure Circuit and Liquid Line Circuit
- Economizer Control With Adjustments For Both Enthalpy Or Dry Bulb Sensor
- Economizer Status Output Contacts
- Emergency Ventilation Control (Systems Equipped with Ventilation Package)
- Forced Cooling (Overrides Economizer Operation)
- Dehumidification Control (Systems Equipped With Electric Reheat Or Hot Gas Reheat Dehumidification)
- Lockout Contacts (Normally Open Or Normally Closed)
- Alarms Communicated Via MODBUS

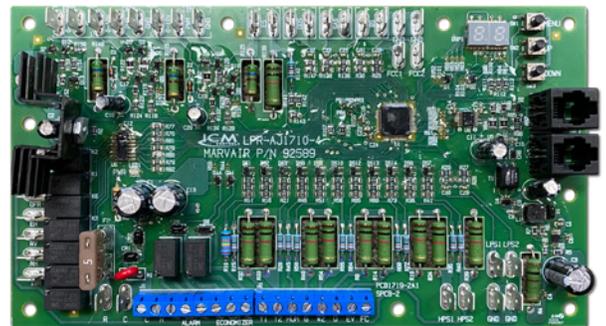

➤ Ambient Temperature Operating Ranges

Basic Model	Special Option	TEMPERATURE RANGES
Non-Economizer	Base Unit/Desert Duty	0°F - 131°F (-18°C - 55°C)
Economizer-Equipped	Base Unit/Desert Duty	-40°F - 131°F (-40°C - 55°C)

➤ SCFM @ Various External Static Pressures

Model Number	IWG Static Pressure						
	0.10	0.15	0.20	0.25	0.30	0.40	0.50
MAA1018A	685	670	670	642	640	600	
MAA1020A	800	785	770	725	680	600	
MAA1024A	800	785	770	725	680	600	500
MAA1030A	1200	1150	1100	1050	1000	900	800
MAA1036A	1290	1230	1170	1115	1060	1000	920
MAA1042A	1500	1430	1360	1295	1230	1160	1070
MAA1048A	1950	1900	1850	1815	1760	1680	1590
MAA1060A/MAA2072A & MGA1072A	1900	1850	1800	1700	1600	1500	1350

Values in bold are the minimum air flow.
 Air flow ratings of 208-230 volt units are at 230v. Air flow ratings of 460 volt units are at 460 volts.
 Operation of units at a voltage different from the rating point will affect air flow.

Model Identification

Example	M	A	A	1	0	3	6	A	D	0	5	0	C	+	+	+	+	1	E	A	+	A	2	1	+	+	+	+	+	+
Position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30

1	Unit Designation/Family	M = Marvair Wall Mount S = Stock Unit
2	Energy Efficiency Ratio (EER)	A = 11 G = 10
3	Refrigerant Type	A = R-410a
4	Compressor Type/Quantity	1 = Fixed Speed/Single 2 = 2-Stage/Single
5	Unit Capacity/Nominal Cooling (BTUH)	018 = 18,000 042 = 42,000 020 = 20,000 048 = 48,000 024 = 24,000 060 = 60,000 030 = 30,000 072 = 72,000 036 = 36,000
6		
7		
8	System Type	A = Air Conditioner
9	Power Supply (Volts-Hz-Phase)	A = 208/230-60-1 D = 460-60-3 C = 208/230-60-3 Z = 575-60-3
10	Heat Designation @ Rated Voltage	000 = No Heat 080 = 8KW 022 = 2.2KW 090 = 9KW 036 = 3.6KW 100 = 10KW 040 = 4KW 120 = 12KW 050 = 5KW 150 = 15KW 060 = 6KW
11		
12		
13	Ventilation Configuration	A = Solid Front Door C = Economizer D = Motorized Damper w/Pressure Relief E = Motorized Damper w/Pressure Relief & Independent Motorized Damper Control F = No Free Cooling, 100% Emergency Ventilation Only w/Independent Control K = Economizer w/Factory Installed CO2 Control N = Barometric Damper w/15% OSA + = None \$ = Special
14	Dehumidification	G = Hot Gas Reheat R = Electric Reheat T = Electric Reheat w/Humidity Control + = None \$ = Special
15	Controls	A = Power Fail Alarm w/Additional Lockouts C = 24V EMS Relay Kit D = 24V EMS Relay Kit w/Factory Installed T-Stat E = Factory Installed T-Stat + = None \$ = Special
16	Operating Condition	A = Evaporator Freeze Sensor (EFS) C = EFS w/Hot Gas Bypass D = Desert Duty F = Desert Duty w/Hard Start G = Desert Duty w/EFS H = Desert Duty w/Hard Start & EFS N = Hard Start P = Hard Start w/Low Ambient & CCH Q = Hard Start w/Low Ambient & Fan Cycle Control (FCC) R = Crank Case Heater (CCH) T = Hard Start w/EFS U = Hard Start w/Hot Gas Bypass V = Hard Start w/Low Ambient & CCH & EFS W = Low Ambient w/CCH Y = Low Ambient w/CCH & FCC Z = Low Ambient w/CCH & EFS 1 = Low Ambient w/FCC 2 = Low Ambient w/FCC & EFS + = None \$ = Special

17	Indoor Air Quality Features	D = Dry Bulb Sensor E = Dry Bulb Sensor w/Dirty Filter G = Dirty Filter Sensor M = Dry Bulb Sensor & CO2 Sensor (Only w/Economizer) + = None \$ = Special
18	Air Flow	1 = Top Supply/Bottom Return 2 = Center Supply (Reverse) 3 = Bottom Supply/Top Return (Counter) 4 = Top Panel Discharge 5 = Centrifugal Blowers 6 = 3T3 7 = 3T5 8 = 4T2 9 = 4T3 A = 3T2 \$ = Special
19	Compressor Location	C = Center - All 6 ton units D = Left Hand - All 3 1/2 to 5 ton units E = Right Hand - All 1 1/2 to 3 ton units
20	Filter Option	A = 2" Pleated (MERV 8, AC/HP-C) C = 2" Charcoal D = MERV 11 High Filtration Package E = MERV 13 High Filtration Package F = Filter Access Through Return Air Grille W = Aluminum Washable + = None \$ = Special
21	Corrosion Protection	A = Condenser Coil Only C = Evaporator Coil Only D = Both Coils Condenser & Evaporator E = All Coils Cond/Evap/Reheat F = Coat All G = Coastal Package & Evaporator Coil K = Coastal Package + = None \$ = Special
22	Engineering Revision Level	A1 B2 D3
23		A2 C2 C3
24	Cabinet Color	1 = Marvair Beige 2 = Gray 3 = Carlsbad Canyon 4 = White 5 = Stainless Steel Exterior 6 = Dark Bronze 7 = .050 Aluminum Stucco 8 = Mesa Tan 9 = Pebble Gray A = Stainless Steel - Unit \$ = Custom Color (Powder Coat)
25	Sound Attenuation	2 = Compressor Blanket + = None
26	Security Option	A = Lockable Access Plate/Tamper Proof C = Tamper Proof Screws D = Lockable Access Plate w/Tamper Proof + = None \$ = Special
27	Fastener/Drain Pan Option	A = Stainless Steel Fasteners C = Stainless Steel Drain Pan D = Stainless Steel Fasteners & Drain Pan + = None \$ = Special
28	Unused	C = Copeland Compressor + = None \$ = Special
29	Unused	+ = None \$ = Special
30	Special Variation	+ = None \$ = Special Configuration Not Covered by Model Nomenclature

Note: Not all options are available with all configurations. Contact your Marvair sales representative for configuration details and feature compatibility.

Marvair Single Stage Wall Mount Air Conditioner Performance Data

Certified Efficiency and Capacity Ratings at ANSI/AHRI Standard 390 for Air Conditioners with Single Stage Compressor



Model Number	MAA1018A	MAA1020A	MAA1024A	MAA1030A	MAA1036A	MAA1042A	MAA1048A	MAA1060A	MGA1072A
	A	A	A C D Z	A C D Z	A C D Z	A C D Z	A C D Z	A C D Z	A C D Z
Cooling BTUH ¹	17,500	20,000	24,000	29,000	35,000	41,000	45,000	54,600	70,000
EER ²	11.00	11.00	11.00	11.00	11.00	11.50	11.00	11.00	10.00
Rated Air Flow (CFM ³)	660	760	850	1,070	1,200	1,250	1,400	1,750	2,000

¹Cooling rated at 95°F (35°C) outdoor and 80°F DB/67° WB (26.5°C DB/19.5°C WB) return air ²EER=Energy Efficiency Ratio

³CFM=Cubic Feet per Minute

Ratings are with no outside air. Performance will be affected by altitude.

Ratings are at 230 volts for 208/230 volt units ("A" & "C" models) and 460 volts for "D" models. Operation of units at a different voltage from that of the rating point will affect performance and air flow.

Sensible Total Heat Ratio @ 95°F (35°C) Outside Air Dry Bulb - Air Conditioners with Single Stage Compressor

Model Number	MAA1018A	MAA1020A	MAA1024A	MAA1030A	MAA1036A	MAA1042A	MAA1048A	MAA1060A	MGA1072A
	A	A	A C D Z	A C D Z	A C D Z	A C D Z	A C D Z	A C D Z	A C D Z
Total Capacity	17,500	20,000	24,000	29,000	35,000	41,000	45,000	54,600	70,000
Sensible Heat Ratio	0.77	0.78	0.74	0.76	0.71	0.71	0.71	0.71	0.65
Sensible Capacity	13,500	15,600	17,700	22,000	25,000	29,000	32,100	39,000	45,700
Rated Air Flow (CFM ¹)	660	760	850	1,070	1,200	1,250	1,400	1,750	2,000

¹CFM=Cubic Feet per Minute

Sensible heat ratios based upon ANSI/AHRI std. 390 outdoor air conditions of 95°F (35°C) and 80°F DB/67° WB (26.5°C DB/19.5°C WB) return air.

Cooling Performance (BTUH) at Various Outdoor Temperatures Air Conditioners with Single Stage Compressor

Basic Model	Return Air DB/WB °F (°C)	Cooling Capacity BTUH	Outdoor Temperature											
			75°F (24°C)	80°F (27°C)	85°F (30°C)	90°F (32°C)	95°F (35°C)	100°F (38°C)	105°F (41°C)	110°F (43°C)	115°F (46°C)	120°F (49°C)	125°F (52°C)	130°F (54°C)
MAA1018A	72/61 (22/16)	Total	18,165	17,535	16,923	16,293	15,663	15,033	14,403	13,790	13,475	13,160	12,845	12,530
		Sensible	13,435	13,176	12,927	12,671	12,417	12,165	11,914	11,672	11,547	11,424	11,300	11,177
	76/63 (24/17)	Total	18,883	18,235	17,570	16,923	16,275	15,628	14,980	14,315	14,000	13,685	13,370	13,055
		Sensible	14,599	14,342	14,080	13,826	13,574	13,324	13,075	12,820	12,700	12,581	12,462	12,343
	80/67 (27/19)	Total	20,300	19,600	18,900	18,200	17,500	16,503	16,100	15,400	15,050	14,735	14,420	14,105
		Sensible	14,497	14,238	13,981	13,726	13,472	13,114	12,970	12,721	12,597	12,486	12,375	12,264
84/71 (29/22)	Total	21,718	20,965	20,230	19,478	18,725	17,973	17,220	16,485	16,100	15,785	15,470	15,155	
	Sensible	14,323	14,065	13,815	13,561	13,308	13,057	12,808	12,565	12,439	12,336	12,233	12,131	
MAA1020A	72/61 (22/16)	Total	20,760	20,040	19,340	18,620	17,900	17,180	16,460	15,760	15,400	15,040	14,680	14,320
		Sensible	15,541	15,246	14,961	14,670	14,380	14,092	13,805	13,528	13,387	13,245	13,104	12,964
	76/63 (24/17)	Total	21,580	20,840	20,080	19,340	18,600	17,860	17,120	16,360	16,000	15,640	15,280	14,920
		Sensible	16,906	16,613	16,314	16,024	15,736	15,450	15,166	14,876	14,739	14,602	14,466	14,330
	80/67 (27/19)	Total	23,200	22,400	21,600	20,800	20,000	19,200	18,400	17,600	17,200	16,840	16,480	16,120
		Sensible	16,788	16,493	16,200	15,909	15,619	15,331	15,045	14,761	14,619	14,493	14,366	14,240
84/71 (29/22)	Total	24,820	23,960	23,120	22,260	21,400	20,540	19,680	18,840	18,400	18,040	17,680	17,320	
	Sensible	16,589	16,295	16,009	15,719	15,430	15,144	14,859	14,582	14,438	14,321	14,203	14,086	
MAA1024A	72/61 (22/16)	Total	24,912	24,048	23,208	22,344	21,480	20,616	19,752	18,912	18,480	18,048	17,616	17,184
		Sensible	17,779	17,421	17,074	16,720	16,369	16,020	15,672	15,337	15,165	14,994	14,823	14,653
	76/63 (24/17)	Total	25,896	25,008	24,096	23,208	22,320	21,432	20,544	19,632	19,200	18,768	18,336	17,904
		Sensible	19,254	18,898	18,534	18,183	17,833	17,486	17,142	16,790	16,624	16,459	16,294	16,130
	80/67 (27/19)	Total	27,840	26,880	25,920	24,960	24,000	23,040	22,080	21,120	20,640	20,208	19,776	19,344
		Sensible	19,123	18,765	18,408	18,054	17,703	17,353	17,007	16,662	16,491	16,337	16,183	16,030
84/71 (29/22)	Total	29,784	28,752	27,744	26,712	25,680	24,648	23,616	22,608	22,080	21,648	21,216	20,784	
	Sensible	18,895	18,537	18,190	17,837	17,487	17,139	16,793	16,458	16,283	16,141	15,999	15,857	
MAA1030A	72/61 (22/16)	Total	30,102	29,058	28,043	26,999	25,955	24,911	23,867	22,852	22,330	21,808	21,286	20,764
		Sensible	21,986	21,556	21,141	20,716	20,294	19,875	19,458	19,055	18,848	18,642	18,437	18,233
	76/63 (24/17)	Total	31,291	30,218	29,116	28,043	26,970	25,897	24,824	23,722	23,200	22,678	22,156	21,634
		Sensible	23,863	23,436	23,000	22,578	22,159	21,742	21,328	20,906	20,706	20,508	20,310	20,112
	80/67 (27/19)	Total	33,640	32,480	31,320	30,160	29,000	27,840	26,680	25,520	24,940	24,418	23,896	23,374
		Sensible	23,698	23,268	22,841	22,416	21,994	21,575	21,158	20,744	20,538	20,354	20,169	19,986
84/71 (29/22)	Total	35,989	34,742	33,524	32,277	31,030	29,783	28,536	27,318	26,680	26,158	25,636	25,114	
	Sensible	23,414	22,986	22,570	22,146	21,726	21,308	20,893	20,491	20,281	20,110	19,939	19,769	
MAA1036A	72/61 (22/16)	Total	36,330	35,070	33,845	32,585	31,325	30,065	28,805	27,580	26,950	26,320	25,690	25,060
		Sensible	25,227	24,702	24,194	23,675	23,159	22,647	22,138	21,647	21,395	21,145	20,895	20,646
	76/63 (24/17)	Total	37,765	36,470	35,140	33,845	32,550	31,255	29,960	28,630	28,000	27,370	26,740	26,110
		Sensible	27,247	26,725	26,192	25,676	25,164	24,655	24,150	23,634	23,391	23,149	22,908	22,667
	80/67 (27/19)	Total	40,600	39,200	37,800	36,400	35,000	33,600	32,200	30,800	30,100	29,470	28,840	28,210
		Sensible	27,064	26,537	26,015	25,495	24,980	24,468	23,959	23,454	23,203	22,978	22,753	22,529
84/71 (29/22)	Total	43,435	41,930	40,460	38,955	37,450	35,945	34,440	32,970	32,200	31,570	30,940	30,310	
	Sensible	26,738	26,213	25,703	25,186	24,672	24,161	23,655	23,163	22,907	22,699	22,490	22,283	
MAA1042A	72/61 (22/16)	Total	42,558	41,082	39,647	38,171	36,695	35,219	33,743	32,308	31,570	30,832	30,094	29,356
		Sensible	29,390	28,759	28,151	27,530	26,913	26,301	25,693	25,107	24,807	24,508	24,211	23,914
	76/63 (24/17)	Total	44,239	42,722	41,164	39,647	38,130	36,613	35,096	33,538	32,800	32,062	31,324	30,586
		Sensible	31,708	31,081	30,442	29,824	29,211	28,603	27,999	27,384	27,094	26,805	26,518	26,231
	80/67 (27/19)	Total	47,560	45,920	44,280	42,640	41,000	39,360	37,720	36,080	35,260	34,522	33,784	33,046
		Sensible	31,522	30,890	30,262	29,640	29,022	28,410	27,802	27,198	26,899	26,630	26,362	26,095
84/71 (29/22)	Total	50,881	49,118	47,396	45,633	43,870	42,107	40,344	38,622	37,720	36,982	36,244	35,506	
	Sensible	31,169	30,537	29,926	29,305	28,689	28,078	27,472	26,884	26,579	26,329	26,081	25,833	
MAA1048A	72/61 (22/16)	Total	46,710	45,090	43,515	41,895	40,275	38,655	37,035	35,460	34,650	33,840	33,030	32,220
		Sensible	32,342	31,653	30,988	30,308	29,634	28,965	28,300	27,659	27,331	27,004	26,678	26,354
	76/63 (24/17)	Total	48,555	46,890	45,180	43,515	41,850	40,185	38,520	36,810	36,000	35,190	34,380	33,570
		Sensible	34,905	34,220	33,521	32,846	32,176	31,511	30,851	30,178	29,861	29,545	29,230	28,916
	80/67 (27/19)	Total	52,200	50,400	48,600	46,800	45,000	43,200	41,400	39,600	38,700	37,890	37,080	36,270
		Sensible	34,696	34,005	33,319	32,639	31,964	31,294	30,629	29,970	29,642	29,348	29,054	28,762
84/71 (29/22)	Total	55,845	53,910	52,020	50,085	48,150	46,215	44,280	42,390	41,400	40,590	39,780	38,970	
	Sensible	34,303	33,613	32,945	32,266	31,593	30,925	30,262	29,620	29,285	29,013	28,741	28,470	
MAA1060A	72/61 (22/16)	Total	56,675	54,709	52,798	50,833	48,867	46,901	44,936	43,025	42,042	41,059	40,076	39,094
		Sensible	39,386	38,555	37,753	36,934	36,120	35,312	34,510	33,735	33,339	32,944	32,551	32,158
	76/63 (24/17)	Total	58,913	56,893	54,818	52,798	50,778	48,758	46,738	44,663	43,680	42,697	41,714	40,732
		Sensible	42,530	41,703	40,861	40,047	39,238	38,435	37,638	36,826	36,443	36,061	35,681	35,302
	80/67 (27/19)	Total	63,336	61,152	58,968	56,784	54,600	52,416	50,232	48,048	46,956	45,973	44,990	44,008
		Sensible	42,266	41,433	40,606	39,786	38,972	38,163	37,361	36,564	36,168	35,813	35,459	35,107
84/71 (29/22)	Total	67,759	65,411	63,118	60,770	58,422	56,074	53,726	51,433	50,232	49,249	48,266	47,284	
	Sensible	41,779	40,948	40,143	39,324	38,512	37,706	36,907	36,131	35,728	35,399	35,070	34,743	
MGA1072A	72/61 (22/16)	Total	72,660	70,140	67,690	65,170	62,650	60,130	57,610	55,160	53,900	52,640	51,380	50,120
		Sensible	46,977	45,885	44,831	43,756	42,690	41,632	40,583	39,570	39,053	38,537	38,024	37,512
	76/63 (24/17)	Total	75,530	72,940	70,280	67,690	65,100	62,510	59,920	57,260	56,000	54,740	53,480	52,220
		Sensible	50,330	49,244	48,137	47,068	46,008	44,956	43,913	42,851	42,351	41,852	41,356	40,861
	80/67 (27/19)	Total	81,200	78,400	75,600	72,800	70,000	67,200	64,400	61,600	60,200	58,940	57,680	56,420
		Sensible	50,040	48,943	47,856	46,778	45,709	44,650	43,599	42,557	42,039	41,575	41,112	40,652
84/71 (29/22)	Total	86,870	83,860	80,920	77,910	74,900	71,890	68,880	65,940	64,400	63,140	61,880	60,620	

Electrical Characteristics - Compressor, Fan & Blower Motors - Air Conditioner with Single Stage Compressor

Basic Model	Compressor				Outdoor Fan Motor				Indoor Blower Motor			
	Type	Volts-Hz-Ph	RLA ¹	LRA ²	Volts-Hz-PH	RPM ³	FLA ⁴	HP ⁵	Volts-Hz-PH	RPM ³	FLA ⁴	HP ⁵
MAA1018AA	Scroll	208/230-60-1	7.7	48.0	208/230-60-1	1075	1.1	1/5	208/230-60-1	725	1.6	1/3
MAA1020AA		208/230-60-1	10.9	62.9	208/230-60-1	1200	3.5	1/3	208/230-60-1	1500	2.8	1/3
MAA1024AA		208/230-60-1	12.8	64.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1500	2.8	1/3
MAA1024AA - B		208/230-60-1	10.8	55.0	208/230-60-1	850	2.2	1/3	208/230-60-1	200-1200	4.1	1/2
MAA1030AA		208/230-60-1	14.1	72.2	208/230-60-1	1200	3.5	1/3	208/230-60-1	1200	4.3	1/2
MAA1030AA - B		208/230-60-1	12.3	63.0	208/230-60-1	850	2.2	1/3	208/230-60-1	200-1200	4.1	1/2
MAA1036AA		208/230-60-1	16.7	109.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1050	4.3	1/2
MAA1036AA - B		208/230-60-1	14.7	75.0	208/230-60-1	1200	1.9	1/3	208/230-60-1	1050	4.1	1/2
MAA1042AA		208/230-60-1	17.0	123.9	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	4.3	1/2
MAA1048AA		208/230-60-1	19.5	130.0	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	4.3	1/2
MAA1060AA		208/230-60-1	24.3	144.2	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	4.3	1/2
MGA1072AA		208/230-60-1	30.8	178.0	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4
MAA1024AC	Scroll	208/230-60-3	8.3	58.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1500	2.8	1/3
MAA1030AC		208/230-60-3	9.0	71.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1200	4.3	1/2
MAA1036AC		208/230-60-3	11.2	84.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1200	4.3	1/2
MAA1042AC		208/230-60-3	13.6	83.1	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	4.3	1/2
MAA1048AC		208/230-60-3	13.7	83.1	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	6.8	3/4
MAA1060AC		208/230-60-3	15.9	110.0	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	6.8	3/4
MGA1072AC		208/230-60-3	22.4	149.0	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4
MAA1024AD	Scroll	460-60-3	3.5	28.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1500	2.8	1/3
MAA1030AD		460-60-3	5.8	38.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1200	4.3	1/2
MAA1036AD		460-60-3	5.6	44.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1200	4.3	1/2
MAA1042AD		460-60-3	6.1	41.0	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	4.3	1/2
MAA1048AD		460-60-3	6.2	41.0	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	6.8	3/4
MAA1060AD		460-60-3	7.7	52.0	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	6.8	3/4
MGA1072AD		460-60-3	10.6	75.0	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4
MAA1024AZ	Scroll	575-60-3	3.3	23.7	208/230-60-1	1200	3.5	1/3	208/230-60-1	1500	2.8	1/3
MAA1030AZ		575-60-3	3.8	36.5	208/230-60-1	1200	3.5	1/3	208/230-60-1	1200	4.3	1/2
MAA1036AZ		575-60-3	3.8	34.0	208/230-60-1	1200	3.5	1/3	208/230-60-1	1200	4.3	1/2
MAA1042AZ		575-60-3	4.8	33.0	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	4.3	1/2
MAA1048AZ		575-60-3	4.8	33.0	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	6.8	3/4
MAA1060AZ		575-60-3	5.7	38.9	208/230-60-1	1200	5.3	1/2	208/230-60-1	1050	6.8	3/4
MGA1072AZ		575-60-3	7.7	54.0	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4

¹RLA = Rated Load Amps ²LRA = Locked Rotor Amps ³RPM = Revolutions per Minute ⁴FLA = Full Load Amps ⁵HP = Horsepower
The 460 volt units will have a step down transformer for the 230 volt motors.

**Summary Electrical Ratings (Wire and Circuit Breaker Sizing) -
 Air Conditioners with Single stage Compressors & Ventilation Configurations:
 C: Economizer, Outside Air with Pressure Relief
 D: Motorized Damper, up to 450 CFM of Outside Air with Pressure Relief
 N: Barometric Damper, up to 15% Outside Air**

Electric Heat		000 = None		022 = 2.2 kW		036 = 3.6 kW		040 = 4 kW		050 = 5 kW		060 = 6 kW		080 = 8 kW		090 = 9 kW		100 = 10 kW		120 = 12 kW		150 = 15 kW	
Basic Model	Volts-Hz-Ph	SPPE ³																					
		MCA ¹	MFS ²																				
MAA1018AA	208/230-60-1	13.1	20	13.1	20	19.5	20																
MAA1020AA	208/230-60-1	19.9	30					23.6	30	28.8	30	34.1	35	44.5	45			54.9	60				
MAA1024AA	208/230-60-1	22.3	35					23.6	35	28.8	35	34.1	35	44.5	45			54.9	60				
MAA1024AA - B	208/230-60-1	19.8	30															56.2	60				
MAA1030AA	208/230-60-1	25.4	35					25.4	35	30.3	35	35.6	40	46.0	50			56.4	60	66.8	70	82.4	90
MAA1030AA - B	208/230-60-1	21.7	30															56.2	60	66.6	70	82.2	90
MAA1036AA	208/230-60-1	28.7	45					28.7	45	30.3	45	35.6	45	46.0	50			56.4	60	66.8	70	82.4	90
MAA1036AA - B	208/230-60-1	24.4	35															56.2	60	66.6	70	82.2	90
MAA1042AA	208/230-60-1	30.9	45							30.9	45	35.6	45	46.0	50			56.4	60	66.8	70	82.4	90
MAA1048AA	208/230-60-1	34.0	50							34.0	50	35.6	50	46.0	50			56.4	60	66.8	70	82.4	90
MAA1060AA	208/230-60-1	40.0	60							40.0	60	40.0	60	46.0	60			56.4	60	66.8	70	82.4	90
MGA1072AA	208/230-60-1	48.6	70							48.6	70	48.6	70	48.6	70			58.9	70	69.3	70	84.9	90
MAA1024AC	208/230-60-3	16.7	20									20.8	25			29.9	30			38.9	40		
MAA1030AC	208/230-60-3	19.1	25									22.3	25			31.4	35			40.4	45	49.4	50
MAA1036AC	208/230-60-3	21.8	30									22.3	30			31.4	35			40.4	45	49.4	50
MAA1042AC	208/230-60-3	26.6	40									26.6	40			31.4	40			40.4	45	49.4	50
MAA1048AC	208/230-60-3	29.2	40									29.2	40			33.9	40			42.9	45	51.9	60
MAA1060AC	208/230-60-3	32.0	45									32.0	45			33.9	45			42.9	45	51.9	60
MGA1072AC	208/230-60-3	38.1	60									38.1	60			38.1	60			42.9	60	51.9	60
MAA1024AD	460-60-3	7.5	15									10.4	15			14.9	15			19.4	20		
MAA1030AD	460-60-3	11.2	15									11.2	15			15.7	20			20.2	25	24.7	25
MAA1036AD	460-60-3	10.9	15									11.2	15			15.7	20			20.2	25	24.7	25
MAA1042AD	460-60-3	12.4	15									12.4	15			15.7	20			20.2	25	24.7	25
MAA1048AD	460-60-3	13.8	20									13.8	20			16.9	20			21.4	25	26.0	30
MAA1060AD	460-60-3	15.7	20									15.7	20			16.9	20			21.4	25	26.0	30
MGA1072AD	460-60-3	18.3	25									18.3	25			18.3	25			21.4	25	26.0	30
MAA1024AZ	575-60-3	6.6	15									8.7	15			12.4	15			16.2	20		
MAA1030AZ	575-60-3	7.9	15									9.3	15			13.0	15			16.8	20	20.5	25
MAA1036AZ	575-60-3	7.9	15									9.3	15			13.0	15			16.8	20	20.5	25
MAA1042AZ	575-60-3	9.8	15									9.8	15			13.0	15			16.8	20	20.5	25
MAA1048AZ	575-60-3	10.8	15									10.8	15			14.0	15			17.8	20	21.5	25
MAA1060AZ	575-60-3	12.0	15									12.0	15			14.0	15			17.8	20	21.5	25
MGA1072AZ	575-60-3	13.7	20									13.7	20			14.0	20			17.8	20	21.5	25

¹MCA = Minimum Circuit Ampacity (Wiring Size Amps) ²MFS = Maximum Fuse or HACR Breaker Size ³SPPE = Single Point Power Entry
 MCA & MFS are calculated at 240 volts on the "A" & "C" models. The 480 volts "D" models are calculated at 480 volts. This chart should only be used as a guideline for estimating conductor size and overcurrent protection. For the requirements of specific units, always refer to the data label on the unit.

Summary Electrical Ratings (Wire and Circuit Breaker Sizing) - Air Conditioners with Electric Reheat ("R") with Single stage Compressors and Ventilation Configurations:

C: Economizer, Outside Air with Pressure Relief

D: Motorized Damper, up to 450 CFM of Outside Air with Pressure Relief

N: Barometric Damper, up to 15% Outside Air

Electric Heat		000 = None		022 = 2.2 kW		036 = 3.6 kW		040 = 4 kW		050 = 5 kW		060 = 6 kW		080 = 8 kW		090 = 9 kW		100 = 10 kW		120 = 12 kW		150 = 15 kW	
Basic Model	Volts-Hz-Ph	SPPE ³																					
		MCA ¹	MFS ²																				
MAA1018AA	208/230-60-1	13.1	20	13.1	20	31.9	35																
MAA1020AA	208/230-60-1	19.9	30					40.8	45	46.0	50	51.2	60	61.6	70			72.0	80				
MAA1024AA	208/230-60-1	22.3	35					43.1	50	48.3	50	53.6	60	64.0	70			74.4	80				
MAA1024AA - B	208/230-60-1	19.8	30															71.9	80				
MAA1030AA	208/230-60-1	25.4	35					46.3	50	51.5	60	56.7	60	67.1	70			77.5	80	87.9	90	103.6	110
MAA1030AA - B	208/230-60-1	21.7	30															73.8	80	84.2	90	99.8	100
MAA1036AA	208/230-60-1	28.7	45					49.5	60	54.7	60	59.9	70	70.3	80			80.8	90	91.2	100	106.8	110
MAA1036AA - B	208/230-60-1	24.4	35															76.5	80	86.9	90	102.5	110
MAA1042AA	208/230-60-1	30.9	45							56.9	60	62.1	70	72.5	80			82.9	90	93.4	100	109.0	110
MAA1048AA	208/230-60-1	34.0	50							60.0	70	65.2	70	75.6	80			86.1	90	96.5	100	112.1	125
MAA1060AA	208/230-60-1	40.0	60							66.0	80	71.2	80	81.6	90			92.1	100	102.5	110	118.1	125
MGA1072AA	208/230-60-1	48.6	70							74.6	100	79.9	100	90.3	110			100.7	110	111.1	125	126.7	150
MAA1024AC	208/230-60-3	16.7	20									34.7	35			43.7	45			52.8	60		
MAA1030AC	208/230-60-3	19.1	25									37.1	40			46.1	50			55.1	60	64.2	70
MAA1036AC	208/230-60-3	21.8	30									39.8	45			48.9	50			57.9	60	66.9	70
MAA1042AC	208/230-60-3	26.6	40									44.6	50			53.7	60			62.7	70	71.7	80
MAA1048AC	208/230-60-3	29.2	40									47.3	50			56.3	60			65.3	70	74.3	80
MAA1060AC	208/230-60-3	32.0	45									50.0	60			59.0	60			68.1	70	77.1	80
MGA1072AC	208/230-60-3	38.1	60									56.1	70			65.2	80			74.2	80	83.2	90
MAA1024AD	460-60-3	7.5	15									16.5	20			21.1	25			25.6	30		
MAA1030AD	460-60-3	11.2	15									20.2	25			24.7	25			29.2	30	33.7	35
MAA1036AD	460-60-3	10.9	15									19.9	20			24.4	25			28.9	30	33.5	35
MAA1042AD	460-60-3	12.4	15									21.4	25			26.0	30			30.5	35	35.0	35
MAA1048AD	460-60-3	13.8	20									22.8	25			27.3	30			31.8	35	36.4	40
MAA1060AD	460-60-3	15.7	20									24.7	30			29.2	30			33.7	35	38.2	40
MGA1072AD	460-60-3	18.3	25									27.3	35			31.8	35			36.3	40	40.9	45
MAA1024AZ	575-60-3	6.6	15									14.2	15			17.9	20			21.7	25		
MAA1030AZ	575-60-3	7.9	15									15.4	20			19.2	20			22.9	25	26.7	30
MAA1036AZ	575-60-3	7.9	15									15.4	20			19.2	20			22.9	25	26.7	30
MAA1042AZ	575-60-3	9.8	15									17.4	20			21.1	25			24.9	25	28.7	30
MAA1048AZ	575-60-3	10.8	15									18.4	20			22.1	25			25.9	30	29.7	30
MAA1060AZ	575-60-3	12.0	15									19.5	20			23.3	25			27.0	30	30.8	35
MGA1072AZ	575-60-3	13.7	20									21.2	25			25.0	30			28.7	30	32.5	35

¹MCA = Minimum Circuit Ampacity (Wiring Size Amps) ²MFS = Maximum Fuse or HACR Breaker Size ³SPPE = Single Point Power Entry
MCA & MFS are calculated at 230 volts on the "A" & "C" models. The 460 volts "D" models are calculated at 460 volts. This chart should only be used as a guideline for estimating conductor size and overcurrent protection. For the requirements of specific units, always refer to the data label on the unit.

Marvair 2-Stage Wall Mount Air Conditioner Performance Data

Certified Efficiency and Capacity Ratings at ANSI/AHRI Standard 390 for Air Conditioners with 2-Stage Compressor



Model Number	MAA2024A	MAA2030A	MAA2036A	MAA2042A	MAA2048A	MAA2060A	MAA2072A	MGA2072A
	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D	A,C,D,Z
Cooling BTUH¹	20,600	29,000	33,000	40,000	46,000	54,000	67,000	66,000
EER²	11.00	11.00	11.00	11.00	11.00	11.00	11.00	10.00
Rated Air Flow (CFM³)	950	1,050	1,180	1,350	1,500	1,800	2,150	2,100

¹Cooling rated at 95°F (35°C) outdoor and 80°F DB/67° WB (26.5°C DB/19.5°C WB) return air ²EER=Energy Efficiency Ratio

³CFM=Cubic Feet per Minute

Ratings are with no outside air. Performance will be affected by altitude.

Ratings are at 230 volts for 208/230 volt units ("A" & "C" models) and 460 volts for "D" models. Operation of units at a different voltage from that of the rating point will affect performance and air flow.

Sensible Total Heat Ratio @ 95°F (35°C) Outside Air Dry Bulb - Air Conditioners with 2-Stage Compressor

Model Number	MAA2024A	MAA2030A	MAA2036A	MAA2042A	MAA2048A	MAA2060A	MAA2072A	MGA2072A
	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D,Z	A,C,D	A,C,D,Z
Total Capacity	20,600	29,000	33,000	40,000	46,000	54,000	67,000	66,000
Sensible Heat Ratio	0.80	0.70	0.70	0.68	0.67	0.67	0.68	0.67
Sensible Capacity	16,500	20,300	23,100	27,200	31,000	36,500	45,560	42,000
Rated Air Flow (CFM¹)	950	1,050	1,180	1,350	1,500	1,800	2,150	2,100

¹CFM=Cubic Feet per Minute

Sensible heat ratios based upon ANSI/AHRI std. 390 outdoor air conditions of 95°F (35°C) and 80°F DB/67° WB (26.5°C DB/19.5°C WB) return air.

Cooling Performance (BTUH) at Various Outdoor Temperatures Air Conditioners with 2-Stage Compressor

MODEL	Return Air DB/WB °F(°C)	Outdoor Temperature												
		Cooling Capacity BTUH	75°F (24°C)	80°F (26.5°C)	85°F (29°C)	90°F (32°C)	95°F (35°C)	100°F (38°C)	105°F (40.5°C)	110°F (43.3°C)	115°F (46.1°C)	120°F (48.9°C)	125°F (51.7°C)	130°F (54.4°C)
MAA2024A	72/61 (22/16)	Total	21383	20641	19920	19179	18438	17695	16954	16233	15862	14317	13493	12699
		Sensible	16449	16154	15869	15576	15286	14996	14708	14429	14287	13695	13382	12699
	76/63 (24/17)	Total	22227	21465	20682	19920	19158	18396	17634	16851	16480	15038	14214	13390
		Sensible	17941	17648	17349	17059	16770	16483	16197	15905	15767	15038	14214	13390
	80/67 (27/19)	Total	23896	23072	22248	21424	20600	19776	18952	18128	17716	16480	15656	14832
		Sensible	17793	17498	17205	16913	16623	16335	16047	15762	15619	15194	14913	14633
	84/71 (29/22)	Total	25556	24679	23814	22928	22042	21156	20270	19405	18952	17922	17098	16274
		Sensible	17559	17265	16980	16690	16401	16114	15828	15550	15405	15078	14817	14557
MAA2030A	72/61 (22/16)	Total	30102	29058	28043	26999	25955	24911	23867	22852	22330	20155	18995	17835
		Sensible	20810	20379	19962	19536	19112	18692	18274	17869	17663	16807	16356	15907
	76/63 (24/17)	Total	31291	30218	29116	28043	26970	25897	24824	23722	23200	21170	20010	18850
		Sensible	22471	22043	21605	21182	20762	20344	19929	19505	19305	18534	18097	17663
	80/67 (27/19)	Total	33640	32480	30218	30160	29000	27840	26680	25520	24940	23200	22040	20880
		Sensible	22310	21878	23232	21023	20600	20180	19762	19347	19140	18525	18118	17713
	84/71 (29/22)	Total	35989	34742	33524	32277	31030	29783	28536	27318	26680	25230	24070	22910
		Sensible	22030	21599	21182	20757	20335	19916	19500	19097	18886	18411	18033	17657
MAA2036A	72/61 (22/16)	Total	34254	33066	31911	30723	29535	28347	27159	26004	25410	22935	21615	20295
		Sensible	23563	23071	22596	22110	21627	21147	20671	20210	19974	19000	18485	17974
	76/63 (24/17)	Total	35607	34386	33132	31911	30690	29469	28248	26994	26400	24090	22770	21450
		Sensible	25431	24942	24443	23961	23481	23005	22532	22048	21821	20942	20444	19950
	80/67 (27/19)	Total	38280	36960	35640	34320	33000	31680	30360	29040	28380	26400	25080	23760
		Sensible	25250	24757	24268	23782	23300	22820	22344	21871	21635	20934	20470	20009
	84/71 (29/22)	Total	40953	39534	38148	36729	35310	33891	32472	31086	30360	28710	27390	26070
		Sensible	24933	24442	23966	23482	23001	22523	22049	21588	21349	20806	20376	19948
MAA2042A	72/61 (22/16)	Total	41520	40080	38680	37240	35800	34360	32920	31520	30800	27800	26200	24600
		Sensible	27931	27328	26746	26151	25561	24974	24391	23828	23540	22350	21722	21098
	76/63 (24/17)	Total	43160	41680	40160	38680	37200	35720	34240	32720	32000	29200	27600	26000
		Sensible	30073	29474	28863	28272	27686	27103	26524	25933	25392	24581	23974	23370
	80/67 (27/19)	Total	46400	44800	43200	41600	40000	38400	36800	35200	34400	32000	30400	28800
		Sensible	29868	29264	28665	28070	27479	26892	26309	25731	25443	24586	24019	23456
	84/71 (29/22)	Total	49640	47920	46240	44520	42800	41080	39360	37680	36800	34800	33200	31600
		Sensible	29499	28897	28313	27719	27130	26546	25965	25402	25109	24446	23920	23397
MAA2048A	72/61 (22/16)	Total	47748	46092	44482	42826	41170	39514	37858	36248	35420	31970	30130	28290
		Sensible	31358	30660	29987	29299	28615	27937	27263	26612	26279	24904	24178	23458
	76/63 (24/17)	Total	49634	47932	46184	44482	42780	41078	39376	37628	36800	33580	31740	29900
		Sensible	33678	32984	32277	31593	30914	30240	29570	28887	28566	27325	26623	25926
	80/67 (27/19)	Total	53360	51520	49680	47840	46000	44160	42320	40480	39560	36800	34960	33120
		Sensible	33451	32752	32058	31369	30685	30006	29332	28663	28330	27339	26685	26035
	84/71 (29/22)	Total	57086	55108	53176	51198	49220	47242	45264	43332	42320	40020	38180	36340
		Sensible	33036	32339	31662	30975	30293	29617	28945	28294	27955	27189	26581	25977
MAA2060A	72/61 (22/16)	Total	56052	54108	52218	50274	48330	46386	44442	42552	41580	37530	35370	33210
		Sensible	37104	36289	35501	34697	33897	33104	32315	31554	31164	29555	28705	27862
	76/63 (24/17)	Total	58266	56268	54216	52218	50220	48222	46224	44172	43200	39420	37260	35100
		Sensible	39885	39074	38247	37448	36654	35865	35082	34283	33907	32455	31633	30818
	80/67 (27/19)	Total	62640	60480	58320	56160	54000	51840	49680	47520	46440	43200	41040	38880
		Sensible	39611	38794	37983	37178	36378	35585	34796	34014	33624	32465	31699	30938
	84/71 (29/22)	Total	67014	64692	62424	60102	57780	55458	53136	50868	49680	46980	44820	42660
		Sensible	39117	38302	37512	36709	35912	35121	34335	33754	33177	32281	31569	30862
MAA2072A	72/61 (22/16)	Total	69857	67435	65079	62656	60234	57811	55388	53032	51821	46774	44082	41390
		Sensible	46625	45604	44618	43611	42610	41617	40631	39678	39191	37178	36117	35063
	76/63 (24/17)	Total	72617	70127	67569	65079	62589	60099	57609	55051	53840	49129	46437	43745
		Sensible	50154	49138	48103	47102	46109	45122	44142	43143	42672	40856	39829	38809
	80/67 (27/19)	Total	78068	75376	72684	69992	67300	64608	61916	59229	59224	53840	51148	48456
		Sensible	49823	48800	47784	46775	45774	44781	43794	42815	42328	40878	39920	38969
	84/71 (29/22)	Total	83519	80625	77799	74905	72011	69117	66223	63397	61916	58551	55859	53167
		Sensible	49217	48196	47206	46201	45202	44212	43229	42276	41780	40658	39769	38885
MGA2072A	72/61 (22/16)	Total	68612	66232	63919	61539	59160	56780	54400	52087	50897	45940	43296	40652
		Sensible	49341	48333	47360	46366	45380	44400	43428	42489	42008	40025	38979	37941
	76/63 (24/17)	Total	71322	68876	66364	63919	61473	59027	56582	54070	52880	48263	45609	42965
		Sensible	53446	52443	51422	50434	49454	48481	47514	46529	46065	44275	43263	42259
	80/67 (27/19)	Total	76676	74032	71388	68744	66100	63456	60812	58168	56846	52880	50236	47592
		Sensible	53130	51120	51117	50122	49134	48154	47181	46216	45736	44306	43362	42425
	84/71 (29/22)	Total	82030	79188	76412	73569	70727	67885	65042	62266	60812	57507	54863	52219
		Sensible	52455	51536	50559	49566	48582	47604	46635	45695	45205	44100	43223	42352

Based upon ANSI/AHRI std. 390 return air conditions of 80°F DB/67° WB (26.5°C DB/19.5°C WB) at various outdoor temperatures.

Electrical Characteristics - Compressor, Fan & Blower Motors - Air Conditioner with 2-Stage Compressor

BASIC MODEL	COMPRESSOR				OUTDOOR FAN MOTOR				INDOOR FAN MOTOR (ECM)			
	Type	VOLTS-HZ-PH	RLA ¹	LRA ²	VOLTS-HZ-PH	RPM ³	FLA ⁴	HP ⁵	VOLTS-HZ-PH	RPM ³	FLA ⁴	HP ⁵
MAA2024AA	SCROLL	208/230-60-1	11.7	58.30	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	2.8	1/3
MAA2030AA		208/230-60-1	15.2	83.00	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2036AA		208/230-60-1	15.2	83.00	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2042AA		208/230-60-1	17.9	96.00	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	1/2
MAA2048AA		208/230-60-1	21.1	104.00	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2060AA		208/230-60-1	27.1	153.0	208/230-60-1	825	2.5	1/2	208/230-60-1	1075	7.3	3/4
MAA2072AA		208/230-60-1	29.7	179.0	208/230-60-1	1200	6.3	3/4	208/230-60-1	1050	6.8	3/4
MGA2072AA		208/230-60-1	29.7	179.2	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4
MAA2024AC	SCROLL	208/230-60-3	6.5	55.40	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	2.8	1/3
MAA2030AC		208/230-60-3	11.6	73.00	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2036AC		208/230-60-3	11.6	73.00	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2042AC		208/230-60-3	14.1	88.00	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2048AC		208/230-60-3	14.0	83.10	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2060AC		208/230-60-3	16.5	110.0	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2072AC		208/230-60-3	17.6	136.0	208/230-60-1	1200	6.3	3/4	208/230-60-1	1050	6.8	3/4
MGA2072AC		208/230-60-3	17.6	136.0	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4
MAA2024AD	SCROLL	460-60-3	3.5	28.00	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	2.8	1/3
MAA2030AD		460-60-3	5.7	38.00	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2036AD		460-60-3	5.7	38.00	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2042AD		460-60-3	6.2	44.00	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2048AD		460-60-3	6.4	41.00	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2060AD		460-60-3	7.2	52.0	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2072AD		460-60-3	8.5	67.1	208/230-60-1	1200	6.3	3/4	208/230-60-1	1050	6.8	3/4
MGA2072AD		460-60-3	8.5	66.1	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4
MAA2030AZ	SCROLL	575-60-3	4.0	25.60	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2036AZ		575-60-3	4.0	25.60	208/230-60-1	825	3.5	1/3	208/230-60-1	1075	4.3	1/2
MAA2042AZ		575-60-3	5.1	30.00	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2048AZ		575-60-3	4.6	33.00	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2060AZ		575-60-3	5.7	43.8	208/230-60-1	825	5.3	1/2	208/230-60-1	1075	7.3	3/4
MAA2072AZ		575-60-3	7.6	55.00	208/230-60-1	825	2.5	1/2	208/230-60-1	1075	5.2	3/4
MGA2072AZ		575-60-3	6.3	55.3	208/230-60-1	1080	3.3	1/2	208/230-60-1	1050	7.3	3/4

¹RLA = Rated Load Amps ²LRA = Locked Rotor Amps ³RPM = Revolutions per Minute ⁴FLA = Full Load Amps ⁵HP = Horsepower
The 460 volt units will have a step down transformer for the 230 volt motors.

**Summary Electrical Ratings (Wire and Circuit Breaker Sizing) -
 Air Conditioners with 2-Stage Compressors & Ventilation Configurations:
 C: Economizer, Outside Air with Pressure Relief
 D: Motorized Damper, up to 450 CFM of Outside Air with Pressure Relief
 N: Barometric Damper, up to 15% Outside Air**

ELECTRIC HEAT		000 = None		022 = 2.2 kw		036 = 3.6 kw		040 = 4 kw		050 = 5 kw		060 = 6 kw		080 = 8 kw		090 = 9 kw		100 = 10 kw		120 = 12 kw		150 = 15 kw	
BASIC MODEL	VOLTS-HZ-PH	SPPE ³																					
		MCA ¹	MFS ²																				
MAA2024AA	208/230-60-1	20.9	30					23.6	30	28.8	30	34.1	35	44.5	50	49.7	50	54.9	60				
MAA2030AA	208/230-60-1	26.8	40					26.8	40	30.3	40	35.6	40	46.0	50			56.4	60	66.8	70	82.4	90
MAA2036AA	208/230-60-1	26.8	40					26.8	40	30.3	40	35.6	40	46.0	50			56.4	60	66.8	70	82.4	90
MAA2042AA	208/230-60-1	35.0	50					35.0	50	35.0	50	38.6	50	48.0	50			59.4	60	69.8	70	85.4	90
MAA2048AA	208/230-60-1	39.0	70					39.0	70	39.0	70	39.0	70	49.0	70			59.4	70	69.8	70	85.4	90
MAA2060AA	208/230-60-1	46.5	80					46.5	80	46.5	80	46.5	80	49.0	80	52.1	60	59.4	80	69.8	80	85.0	90
MAA2072AA	208/230-60-1	50.2	80							50.2	80							58.4	80	68.8	80	84.4	90
MGA2072AA	208/230-60-1	44.8	70							44.8	70	44.8	70			52.1	70			67.7	70	83.3	90
MAA2024AC	208/230-60-3	14.4	20									20.9	25			29.9	35			38.9	40	48.0	50
MAA2030AC	208/230-60-3	22.3	30									22.4	30			31.4	35			40.4	45	49.5	50
MAA2036AC	208/230-60-3	22.3	30									22.4	30			31.4	35			40.4	45	49.5	50
MAA2042AC	208/230-60-3	30.3	40									30.3	40			34.4	35			43.4	45	52.5	60
MAA2048AC	208/230-60-3	30.1	40									30.1	40			34.4	40			43.4	45	52.5	60
MAA2060AC	208/230-60-3	33.2	50									33.2	50			34.4	50			43.4	50	52.5	60
MAA2072AC	208/230-60-3	35.1	50									35.1	50			35.1	50			42.9	50	51.9	60
MGA2072AC	208/230-60-3	29.7	45									29.7	45			32.3	45			41.3	45	50.3	60
MAA2024AD	460-60-3	7.5	15									10.4	15			14.9	20			19.5	20	24.0	25
MAA2030AD	460-60-3	11.0	15									11.2	15			15.7	20			20.3	25	24.8	25
MAA2036AD	460-60-3	11.0	15									11.2	15			15.7	20			20.3	25	24.8	25
MAA2042AD	460-60-3	14.1	20									14.1	20			17.2	20			21.8	25	26.3	30
MAA2048AD	460-60-3	14.3	20									14.3	20			17.2	20			21.8	25	26.3	30
MAA2060AD	460-60-3	15.3	20									15.3	20			17.2	20			21.8	25	26.3	30
MAA2072AD	460-60-3	17.2	25									17.2	25			17.2	25			21.4	25	25.9	30
MGA2072AD	460-60-3	14.5	20									14.5	20			16.1	20			20.6	25	25.1	30
MAA2030AZ	575-60-3	7.5	15									8.3	15			12.0	15			15.6	20	19.2	20
MAA2036AZ	575-60-3	7.5	15									8.3	15			12.0	15			15.6	20	19.2	20
MAA2042AZ	575-60-3	11.4	15									11.4	15			13.7	15			17.2	20	21.0	25
MAA2048AZ	575-60-3	10.8	15									10.8	15			13.7	15			17.4	20	21.0	25
MAA2060AZ	575-60-3	10.2	15									10.2	15			13.0	15			16.5	20	20.1	25
MGA2072AZ	575-60-3	12.6	20									12.6	20			13.0	20			17.0	20	20.2	25

¹MCA = Minimum Circuit Ampacity (Wiring Size Amps) ²MFS = Maximum Fuse or HACR Breaker Size ³SPPE = Single Point Power Entry
 MCA & MFS are calculated at 230 volts on the A & C models. The 460 volts D models are calculated at 460 volts. This chart should only be used as a guideline for estimating conductor size and overcurrent protection. For the requirements of specific units, always refer to the data label on the unit.

Summary Electrical Ratings (Wire and Circuit Breaker Sizing) - Air Conditioners with Electric Reheat ("R") with 2-Stage Compressors and Ventilation Configurations:

C: Economizer, Outside Air with Pressure Relief

D: Motorized Damper, up to 450 CFM of Outside Air with Pressure Relief

N: Barometric Damper, up to 15% Outside Air

ELECTRIC HEAT		000 = None		022 = 2.2 kw		036 = 3.6 kw		040 = 4 kw		050 = 5 kw		060 = 6 kw		080 = 8 kw		090 = 9 kw		100 = 10 kw		120 = 12 kw		150 = 15 kw		
BASIC MODEL	VOLTS-HZ-PH	SPPE ³																						
		MCA ¹	MFS ²																					
MAA2024AA	208/230-60-1	20.9	30					41.8	45	46.9	50	52.2	60	62.5	70			73.0	80					
MAA2030AA	208/230-60-1	26.8	40					47.7	50	52.8	60	58.1	60	68.4	70			78.9	80	89.3	90	104.9	110	
MAA2036AA	208/230-60-1	26.8	40					47.7	50	52.8	60	58.1	60	68.4	70			78.9	80	89.3	90	104.9	110	
MAA2042AA	208/230-60-1	35.0	50					55.9	60	61.0	70	66.3	70	76.6	80			87.1	90	97.5	100	113.1	120	
MAA2048AA	208/230-60-1	39.0	70					60.0	70	65.0	70	70.3	80	80.6	90			91.1	100	101.5	110	117.1	120	
MAA2060AA	208/230-60-1	46.5	80					67.4	80	72.5	80	77.8	80	88.1	90			88.3	90	98.7	100	114.3	120	
MAA2072AA	208/230-60-1	50.2	80					71.1	80	76.2	80	81.5	90	91.8	100			102.3	110	112.7	120	128.3	130	
MGA2072AA	208/230-60-1	44.8	70					65.7	70	70.8	80	76.1	80	86.4	90			96.9	100	107.3	110	122.9	130	
MAA2024AC	208/230-60-3	14.4	20										32.4	35			41.5	45			50.5	60	59.5	60
MAA2030AC	208/230-60-3	22.3	30										40.3	45			49.4	50			58.4	60	67.4	70
MAA2036AC	208/230-60-3	22.3	30										40.3	45			49.4	50			58.4	60	67.4	70
MAA2042AC	208/230-60-3	30.3	40										48.3	50			57.4	60			66.4	70	75.4	80
MAA2048AC	208/230-60-3	30.1	40										48.1	50			57.2	60			66.2	70	75.2	80
MAA2060AC	208/230-60-3	33.2	50										51.2	60			60.3	70			69.4	70	78.3	80
MAA2072AC	208/230-60-3	35.1	50										53.1	60			62.2	70			71.2	80	80.2	90
MGA2072AC	208/230-60-3	29.7	45										47.7	50			56.8	60			65.8	70	74.8	80
MAA2024AD	460-60-3	7.5	15										16.5	20			21.0	25			25.5	30	30.0	35
MAA2030AD	460-60-3	11.0	15										20.0	25			24.5	25			29.0	30	33.5	35
MAA2036AD	460-60-3	11.0	15										20.0	25			24.5	25			29.0	30	33.5	36
MAA2042AD	460-60-3	14.1	20										23.1	25			27.6	30			32.1	35	36.6	40
MAA2048AD	460-60-3	14.3	20										23.3	25			27.8	30			32.3	35	36.8	40
MAA2060AD	460-60-3	15.3	20										24.3	25			28.8	30			33.3	35	37.8	40
MAA2072AD	460-60-3	17.2	25										26.2	30			30.7	35			35.2	40	39.7	40
MGA2072AD	460-60-3	14.5	20										23.5	25			28.0	30			32.5	35	37.0	40
MAA2030AZ	575-60-3	7.5	15										14.8	15			18.4	20			21.9	25	25.5	30
MAA2036AZ	575-60-3	7.5	15										14.8	15			18.4	20			21.9	25	25.5	30
MAA2042AZ	575-60-3	11.4	15										18.7	20			22.3	25			25.8	30	29.4	30
MAA2048AZ	575-60-3	10.8	15										18.1	20			21.7	25			25.2	30	28.8	30
MAA2060AZ	575-60-3	10.2	15										17.5	20			21.0	25			24.6	25	28.2	30
MGA2072AZ	575-60-3	12.5	20										19.8	20			23.4	25			26.9	30	30.5	35





¹MCA = Minimum Circuit Ampacity (Wiring Size Amps) ²MFS = Maximum Fuse or HACR Breaker Size ³SPPE = Single Point Power Entry
MCA & MFS are calculated at 230 volts on the A & C models. The 460 volts D models are calculated at 460 volts. This chart should only be used as a guideline for estimating conductor size and overcurrent protection. For the requirements of specific units, always refer to the data label on the unit.

**Unit Load Amps -
Air Conditioners with with 2-Stage Compressors and Ventilation Configurations:
C: Economizer, Outside Air with Pressure Relief
D: Motorized Damper, up to 450 CFM of Outside Air with Pressure Relief
N: Barometric Damper, up to 15% Outside Air**

BASIC MODEL NUMBER	VOLTS-HZ-PH	CURRENT AMPS		LOAD OF RESISTIVE HEATING - ELEMENTS ONLY (AMPS) <small>(1) ALL HEATING ELEMENTS ARE ON A SEPARATE CIRCUIT (2) SHADED VALUES (12 & 15 kW) UTILIZE TWO CIRCUITS</small>											TOTAL MAXIMUM HEATING AMPS <small>INCLUDES AMPS FROM MOTOR(S) THAT ARE LOCATED ON AN ELECTRICAL CIRCUIT THAT DOES NOT HAVE HEATERS</small>										
				Heating Kilowatts											Heating Kilowatts										
				AC ¹	IBM ²	2.2	3.6	04	05	06	08	09	10	12	15	2.2	3.6	04	05	06	08	09	10	12	15
MAA2024AA	208/230-60-1	18.0	2.8			16.7	20.8	25	33.3		41.7					19.5	23.6	27.8	36.1		44.5				
MAA2030AA	208/230-60-1	23.0	4.3			16.7	20.8	25	33.3		41.7	50.0	62.5			21.0	25.1	29.3	37.6		46.0	54.3	66.8		
MAA2036AA	208/230-60-1	23.0	4.3			16.7	20.8	25	33.3		41.7	50.0	62.5			21.0	25.1	29.3	37.6		46.0	54.3	66.8		
MAA2042AA	208/230-60-1	30.5	7.3			16.7	20.8	25	33.3		41.7	50.0	62.5			24.0	28.1	32.3	40.6		49.0	57.3	69.8		
MAA2048AA	208/230-60-1	33.7	7.3			16.7	20.8	25	33.3		41.7	50.0	62.5			24.0	28.1	32.3	40.6		49.0	57.3	69.8		
MAA2060AA	208/230-60-1	39.7	7.3			16.7	20.8	25	33.3		41.7	50.0	62.5			24.0	28.1	32.3	40.6		49.0	57.3	66.8		
MAA2072AA	208/230-60-1	38.7	6.8			16.7	20.8	25	33.3		41.7	50.0	62.5			23.5	27.6	31.8	40.1		48.5	56.8	69.3		
MGA2072AA	208/230-60-1	37.4	5.2			16.7	20.8	25	33.3		41.7	50.0	62.5			21.9	26.0	30.2	38.5		46.9	55.2	67.7		
MAA2024AC	208/230-60-3	12.8	2.8					14.4		21.7		28.9	36.1					17.2		24.5		31.7	38.9		
MAA2030AC	208/230-60-3	19.4	4.3					14.4		21.7		28.9	36.1					18.7		26.0		33.2	40.4		
MAA2036AC	208/230-60-3	19.4	4.3					14.4		21.7		28.9	36.1					18.7		26.0		33.2	40.4		
MAA2042AC	208/230-60-3	26.7	7.3					14.4		21.7		28.9	36.1					21.7		29.0		36.2	43.4		
MAA2048AC	208/230-60-3	26.7	7.3					14.4		21.7		28.9	36.1					21.7		29.0		36.2	43.4		
MAA2060AC	208/230-60-3	29.1	7.3					14.4		21.7		28.9	36.1					21.7		29.0		36.2	43.4		
MAA2072AC	208/230-60-3	30.7	6.8					14.4		21.7		28.9	36.1					21.2		28.5		35.7	42.9		
MGA2072AC	208/230-60-3	25.3	5.2					14.4		21.7		28.9	36.1					19.6		26.9		34.1	41.3		
MAA2024AD	460-60-3	6.7	1.4					7.2		10.8		14.4	18.0					8.6		12.2		15.8	19.4		
MAA2030AD	460-60-3	9.6	2.2					7.2		10.8		14.4	18.0					9.4		13.0		16.6	20.2		
MAA2036AD	460-60-3	9.6	2.2					7.2		10.8		14.4	18.0					9.4		13.0		16.6	20.2		
MAA2042AD	460-60-3	12.5	3.7					7.2		10.8		14.4	18.0					10.9		14.5		18.1	21.7		
MAA2048AD	460-60-3	12.7	3.7					7.2		10.8		14.4	18.0					10.9		14.5		18.1	21.7		
MAA2060AD	460-60-3	13.5	3.7					7.2		10.8		14.4	18.0					10.9		14.5		18.1	21.7		
MAA2072AD	460-60-3	15.5	3.4					7.2		10.8		14.4	18.0					10.6		14.2		17.7	21.4		
MGA2072AD	460-60-3	12.4	2.6					7.2		10.8		14.4	18.0					9.8		13.4		17.0	20.6		
MAA2030AZ	575-60-3	7.1	1.7					5.8		8.7		11.5	14.4					7.5		10.4		13.2	16.1		
MAA2036AZ	575-60-3	7.1	1.7					5.8		8.7		11.5	14.4					7.5		10.4		13.2	16.1		
MAA2042AZ	575-60-3	10.1	3.0					5.8		8.7		11.5	14.4					8.8		11.7		14.5	17.4		
MAA2048AZ	575-60-3	9.6	3.0					5.8		8.7		11.5	14.4					8.8		11.7		14.5	17.4		
MAA2060AZ	575-60-3	10.7	3.0					5.8		8.7		11.5	14.4					8.8		11.7		14.5	17.4		
MGA2072AZ	575-60-3	9.4	2.1					5.8		8.7		11.5	14.4					7.9		10.8		13.6	16.5		

¹AC = Air Conditioner Unit Amps ²IBM = Indoor Blower Motor
Heating kW is rated at 240 volts on the A & C models. Derate heater output by 25% for operation at 208 volts. Heating kW is rated at 480 volts on the D models.
Total heating and cooling amps includes all motors. Three phase models contain single phase motor loads. Loads are not equally balanced on each phase and values shown are maximum phase loads.

Dimensional Data - MAA1018A

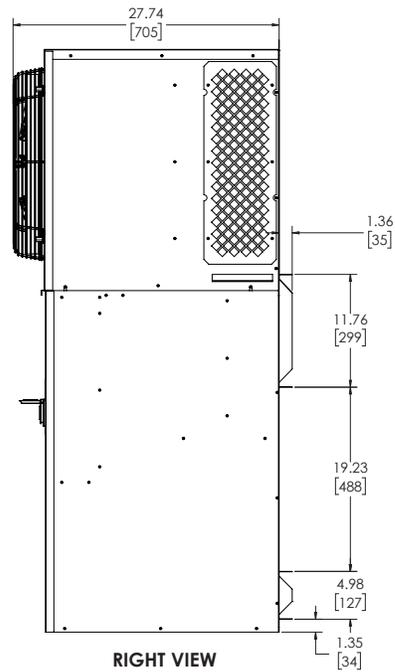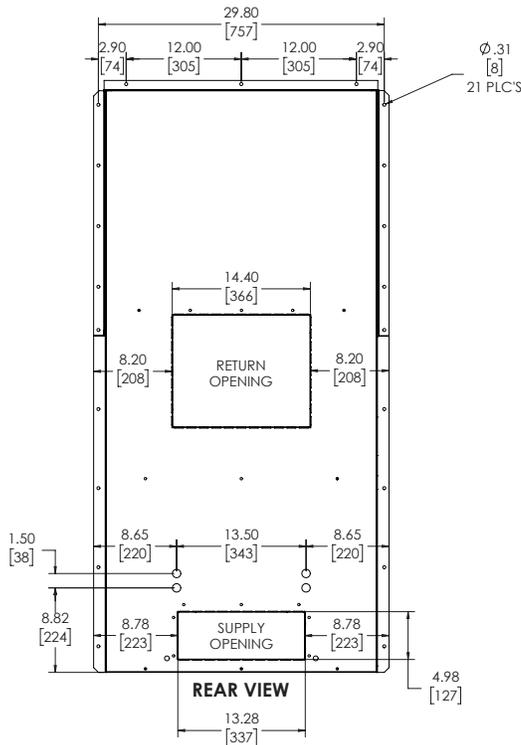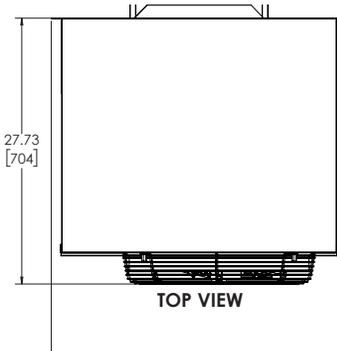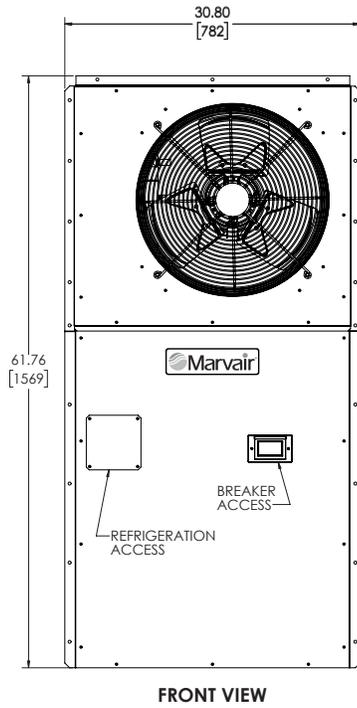


Installation Weight

MAA1018A	Base
Pounds	265
Kilograms	120

Filter Size

MAA1018A	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	14 x 12 x 1	356 x 305 x 25	P/80122	1	N/A

Dimensional Data - MAA1020A, MAA1024A & MAA2024A

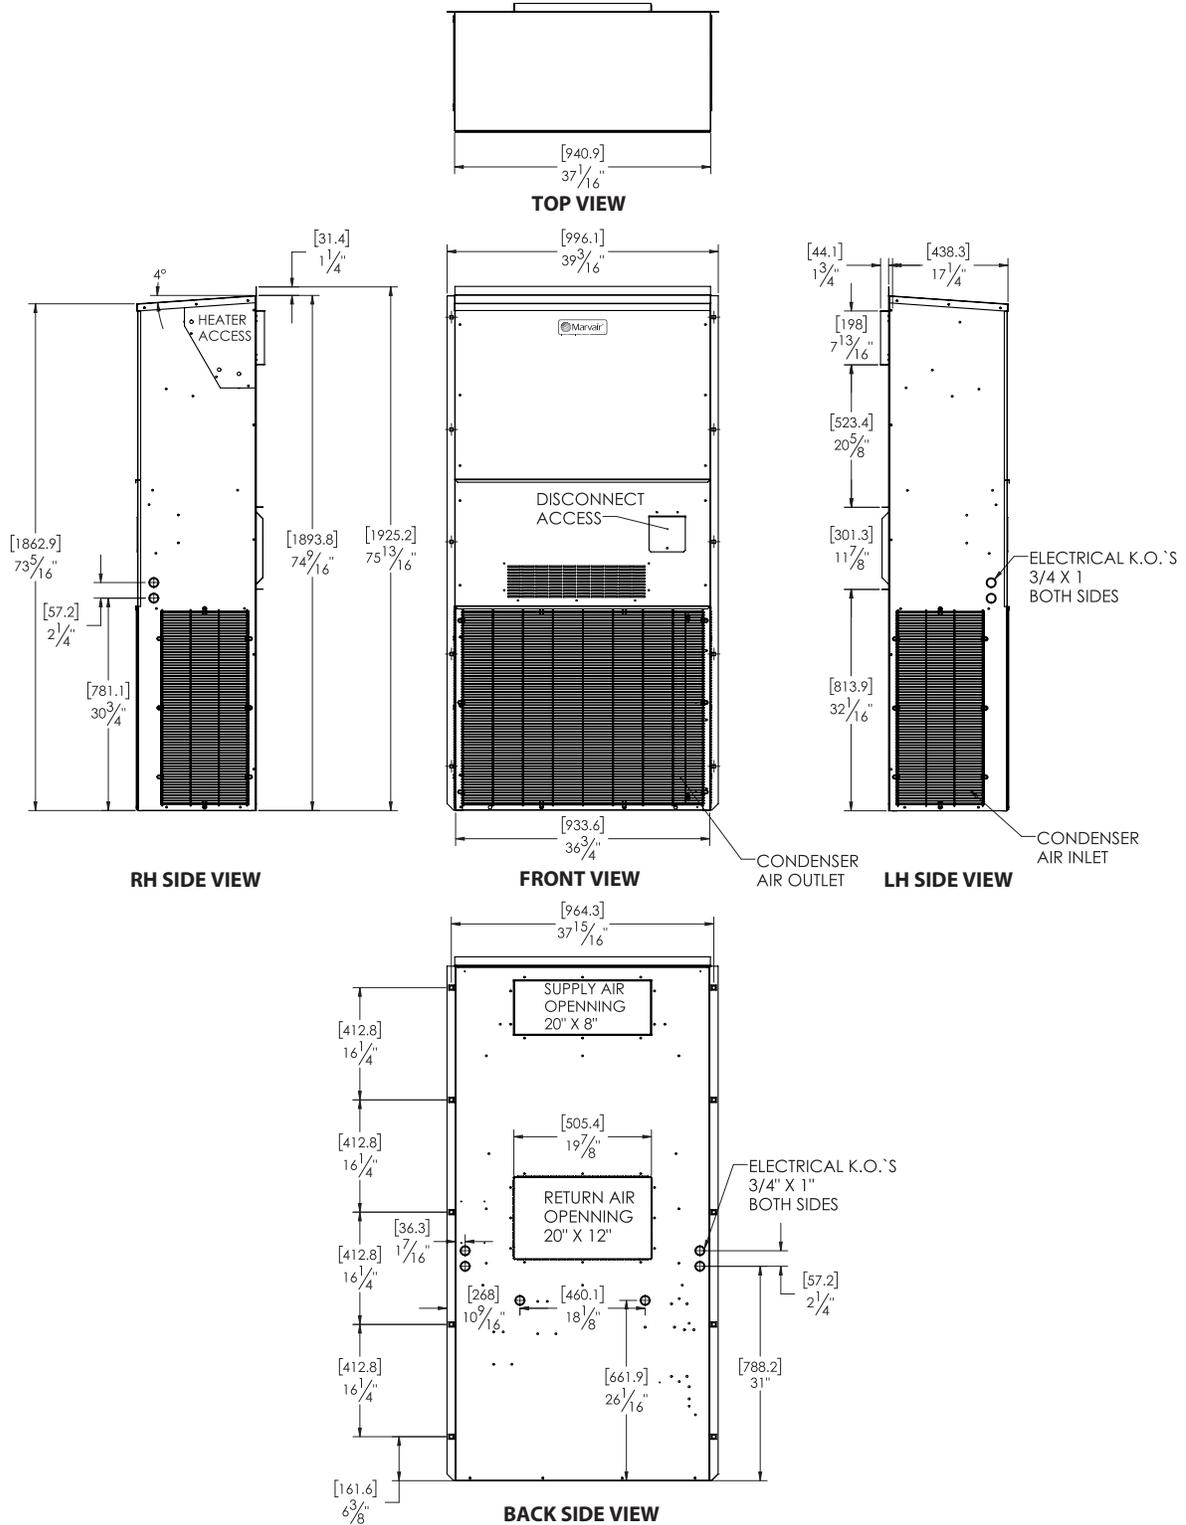



Installation Weight

MAA1020A & MAA1024A	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	337	357	356	376
Kilograms	153	162	161	171

Filter Size

MAA1020A & MAA1024A	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	16 x 25 x 2	406 x 635 x 51	80137	1	8

Dimensional Data - MAA1020A "B2", MAA1024A "B2"

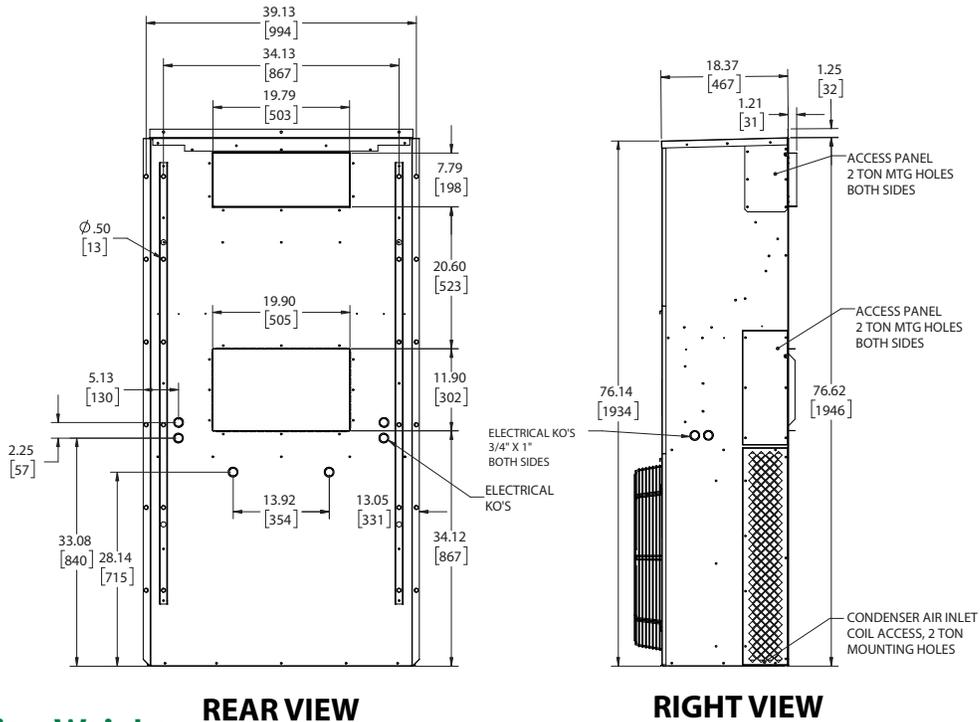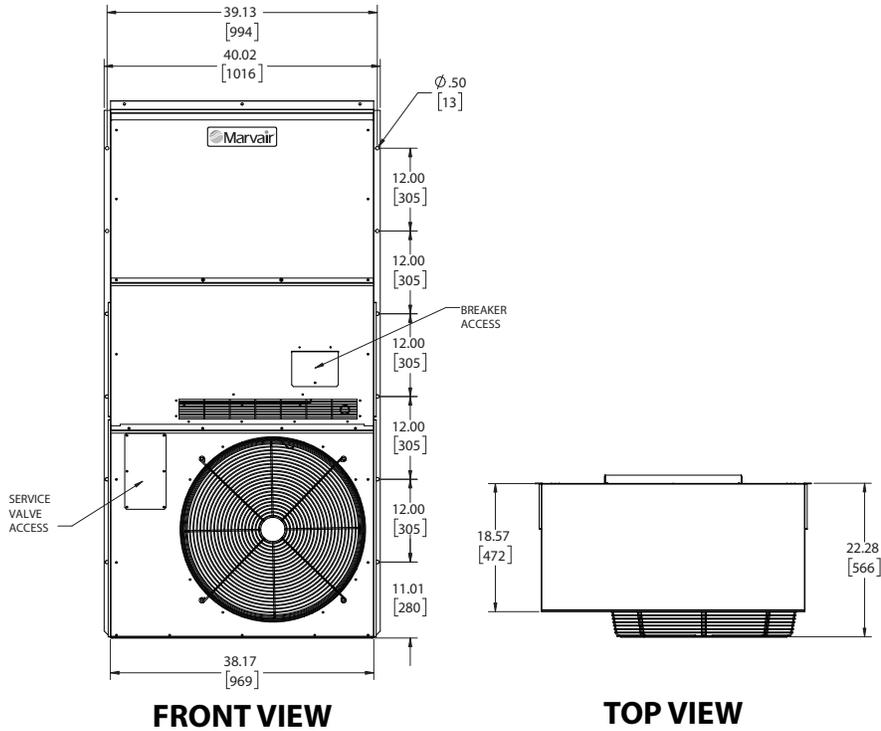

Installation Weight


MAA1020A "B2", MAA1024A "B2"	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	378	400	397	419
Kilograms	171	181	180	190

Return Air Filter

MAA1020A "B2", MAA1024A "B2"	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
INTERNAL¹	16 x 30 x 1	406 x 762 x 25	80136	1	N/A
MAA1020A "B2" RETURN GRILLE²	11½ x 19½ x 1	292 x 495 x 25	91983	1	N/A
MAA1024A "B2" RETURN GRILLE²	27½ x 13½ x 1	699 x 343 x 25	80769	1	N/A

¹Optional; Return grille filter is recommended. ²Recommended

Dimensional Data - MAA1030A, MAA1036A & MAA2030A, MAA2036A

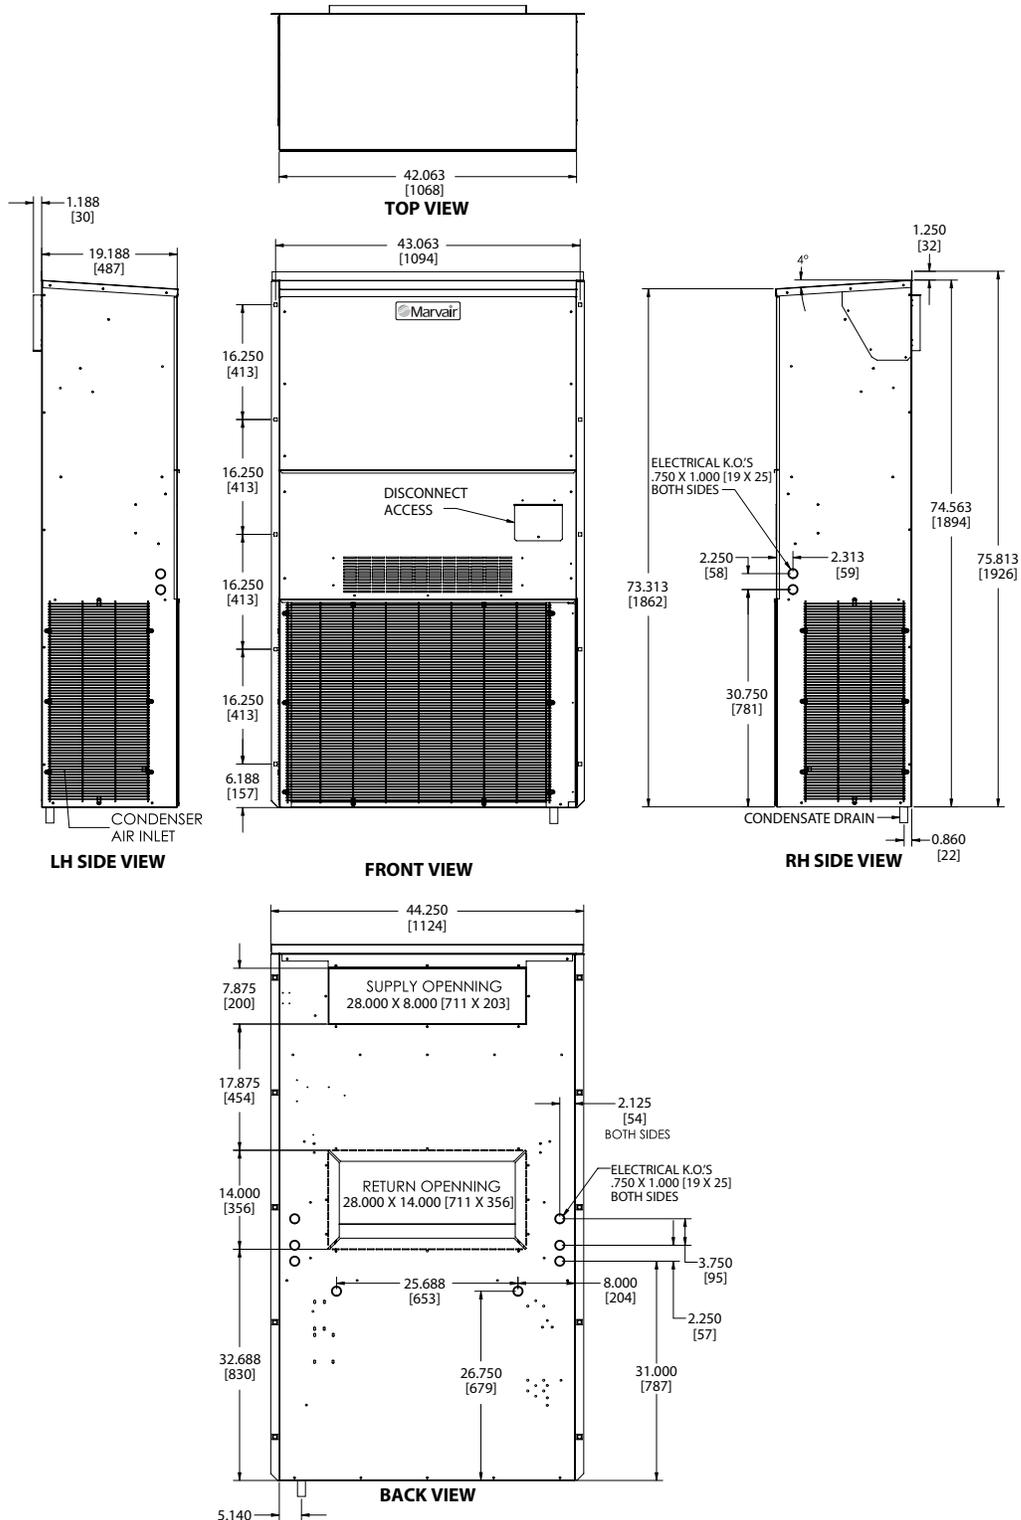


Installation Weight

MAA1030A & MAA1036A	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	397	419	416	438
Kilograms	180	190	189	199


Filter Size

MAA1030A & MAA1036A	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	18 x 30 x 2	457 x 762 x 51	93184	1	8


Dimensional Data - MAA1030A "B2", MAA1036A "B2"

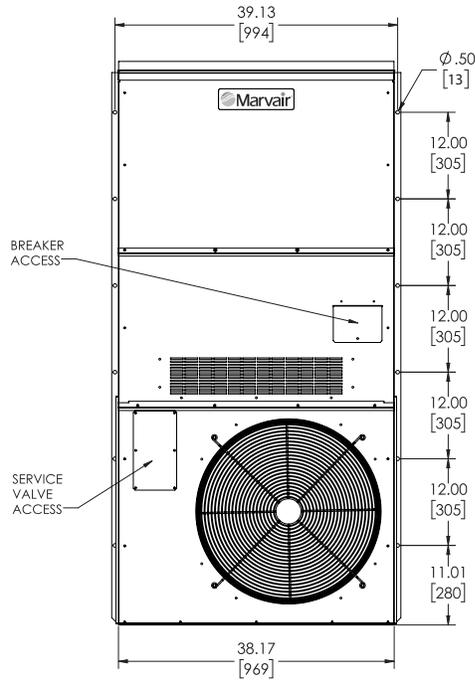


FRONT VIEW

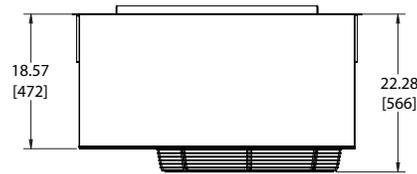

TOP VIEW

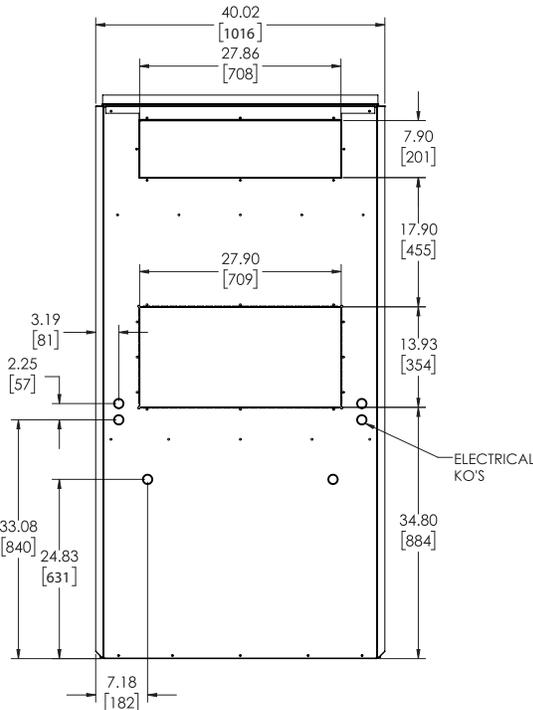

REAR VIEW

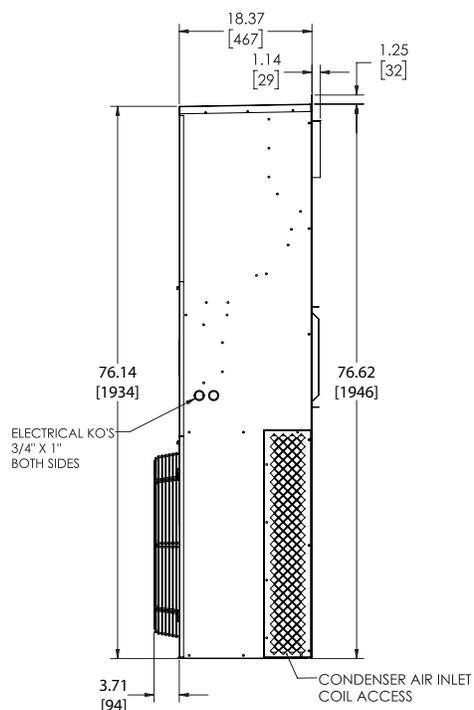

RIGHT VIEW

Installation Weight


MAA1030A "B2", MAA1036A "B2"	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	380	403	418	441
Kilograms	172	183	190	200

Filter Size


MAA1030A "B2", MAA1036A "B2"	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
INTERNAL¹	16 x 30 x 1	406 x 762 x 25	80136	1	N/A
RETURN GRILLE²	27½ x 13½ x 1	699 x 343 x 25	80769	1	N/A

¹Optional; Return grille filter is recommended. ²Recommended



Dimensional Data - MAA2036A 3T3 Reverse Flow

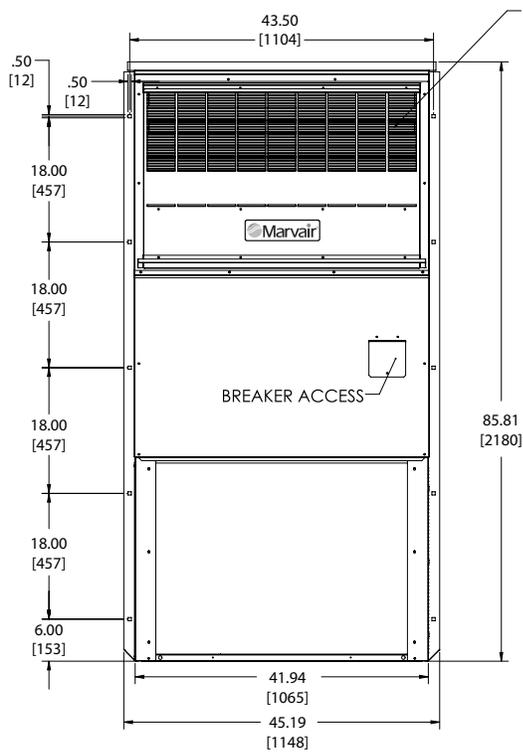


FRONT VIEW

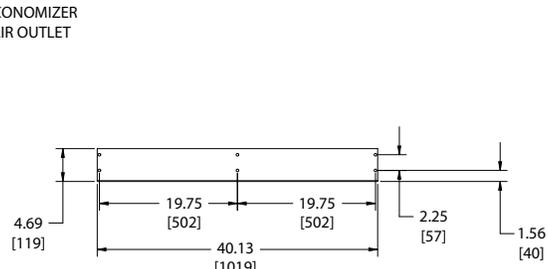


BOTTOM MOUNTING FLANGE

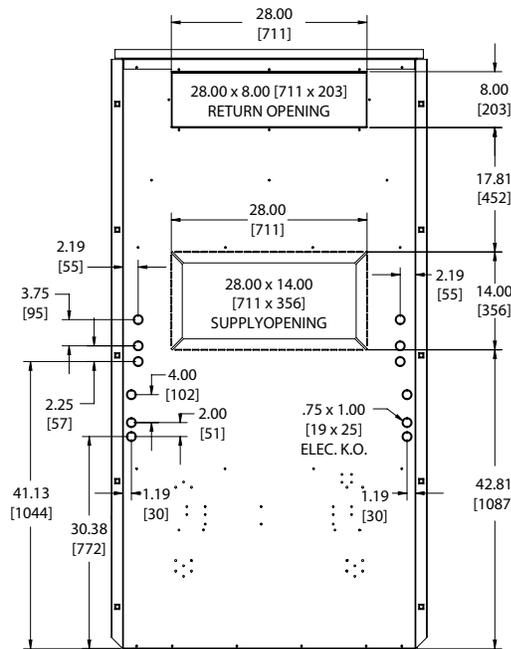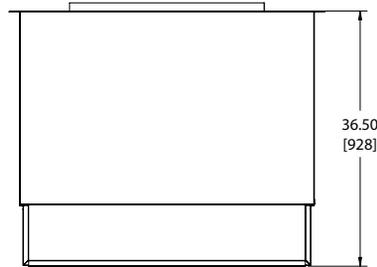

REAR VIEW

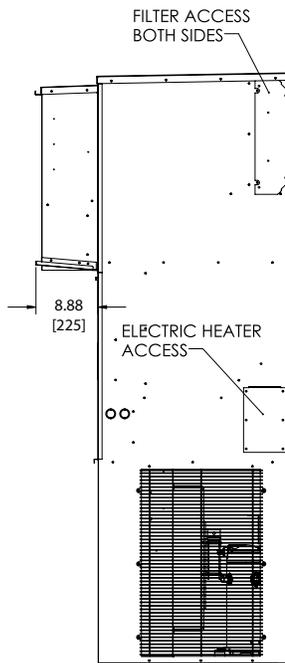

RIGHT VIEW

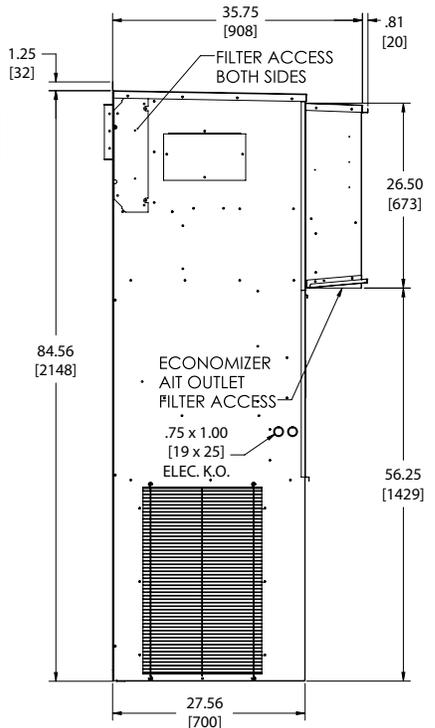

LEFT VIEW


Shipping Weight

MAA2036 3T3 - Reverse Flow	LBS/KGS
With Economizer	685/310.7


Filter Size

MAA2036 3T3 - Reverse Flow	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	16 x 36 x 2	406 x 914 x 51	93244	1	8



Dimensional Data - MAA2036A 3T5 Reverse Flow

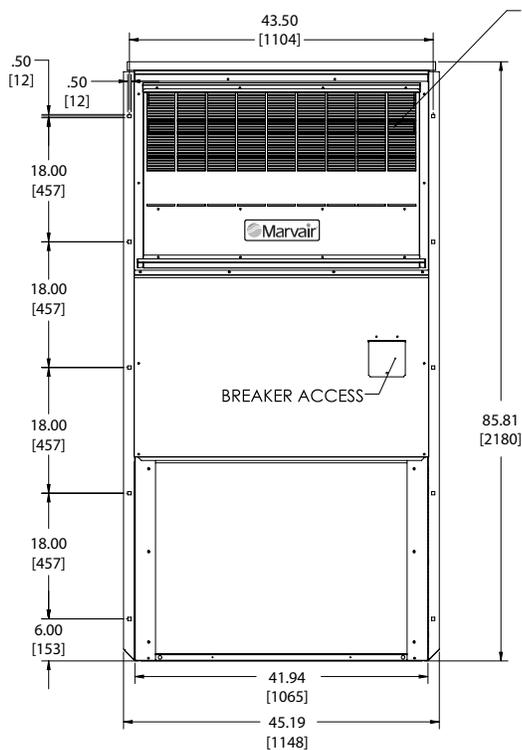


FRONT VIEW

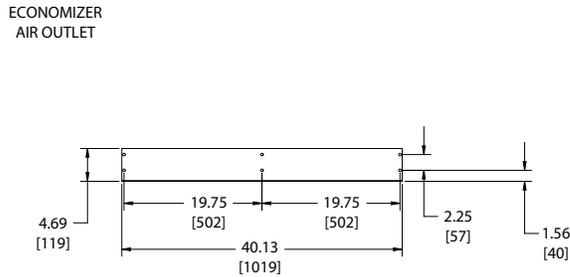


BOTTOM MOUNTING FLANGE

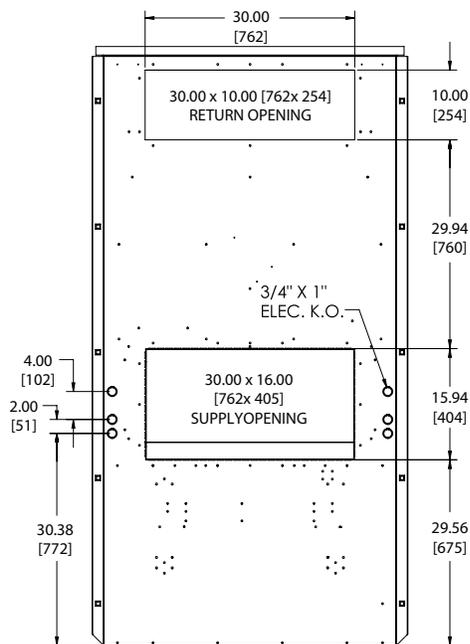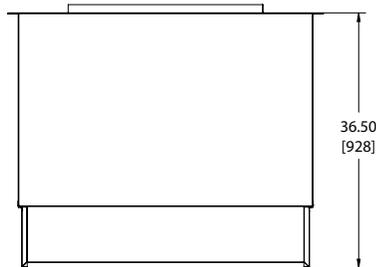

REAR VIEW

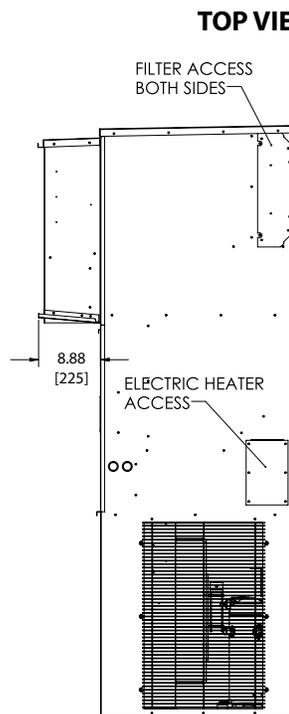

RIGHT VIEW

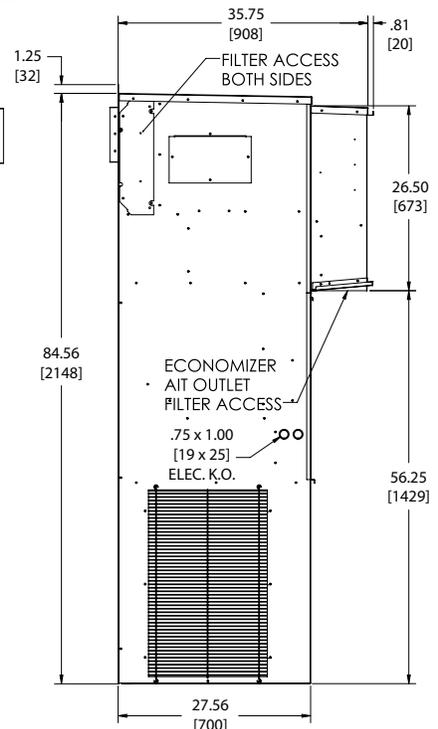

LEFT VIEW




Shipping Weight

MAA2036A 3T5 - Reverse Flow	LBS/KGS
With Economizer	685/310.7

Filter Size

MAA2036A 3T5 - Reverse Flow	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	16 x 36 x 2	406 x 914 x 51	93244	1	8

Dimensional Data - MAA1042A, MAA1048A & MAA2042A, MAA2048A

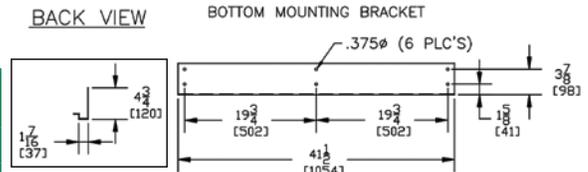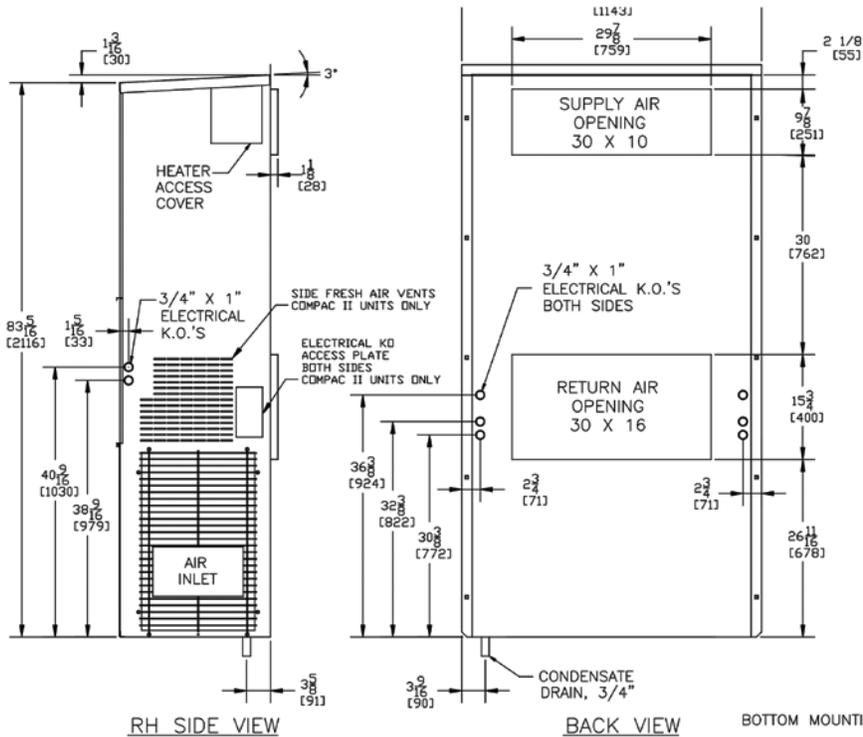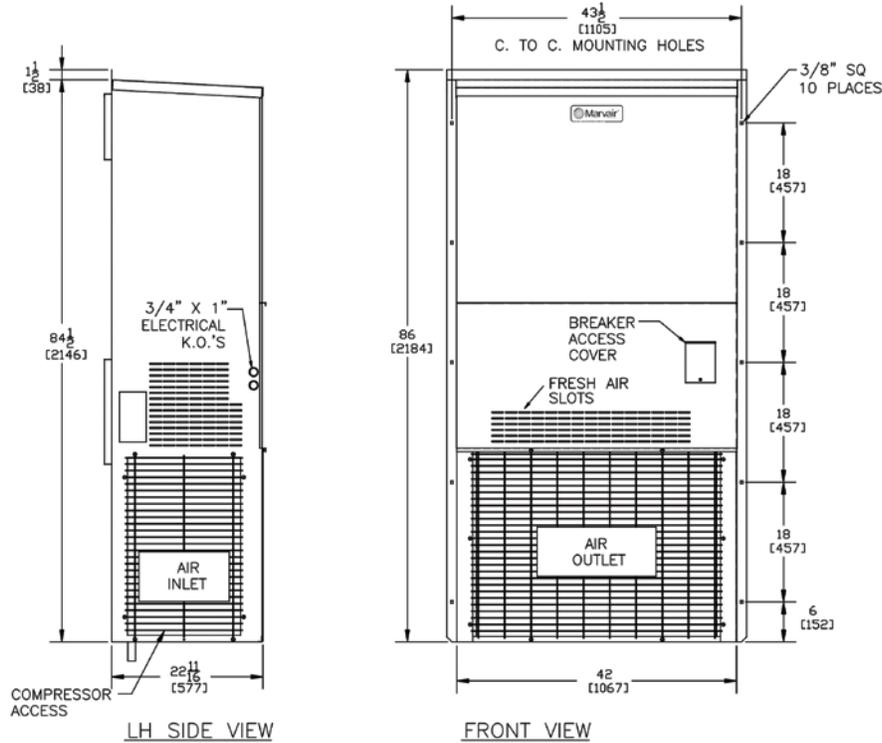


Installation Weight

MAA1042A, MAA1048A & MAA2042, MAA2048A	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	453	476	491	514
Kilograms	205	216	223	233

Filter Size

MAA1042A, MAA1048A & MAA2042, MAA2048A	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	36 1/2 x 22 x 2	927 x 559 x 51	80162	1	8

Dimensional Data - MAA1060A & MAA2060A

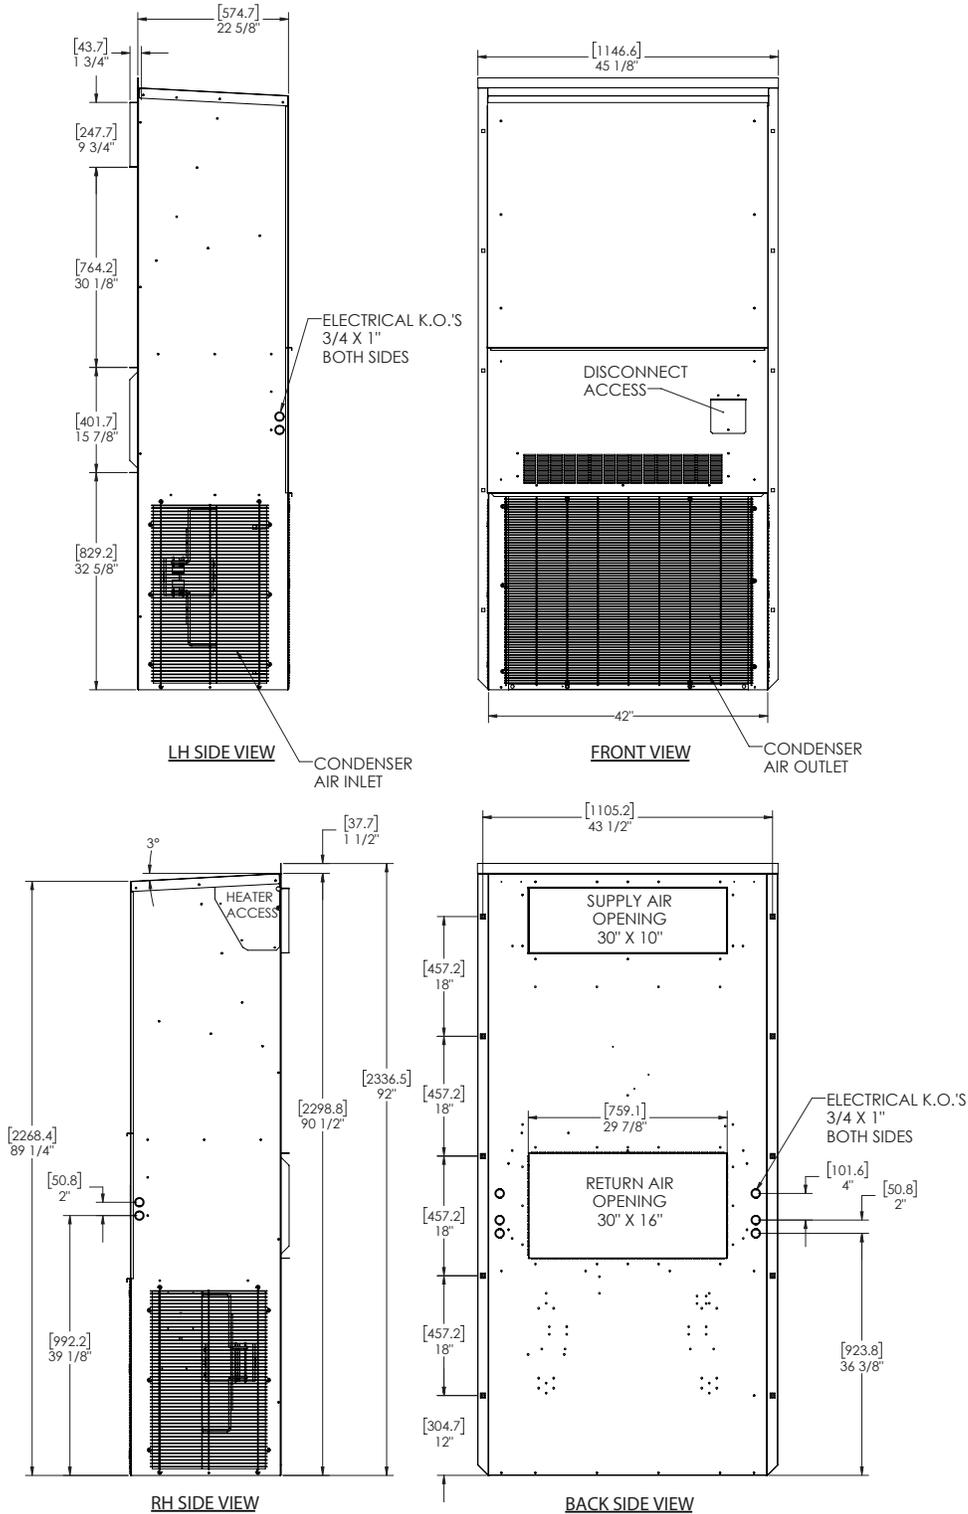


Installation Weight

MAA1060A & MAA2060A	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	469	492	522	545
Kilograms	213	223	237	247


Filter Size

MAA1060A & MAA2060A	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	18 x 24 x 2	457 x 610 x 51	81257	2	8


Dimensional Data - MAA2072A

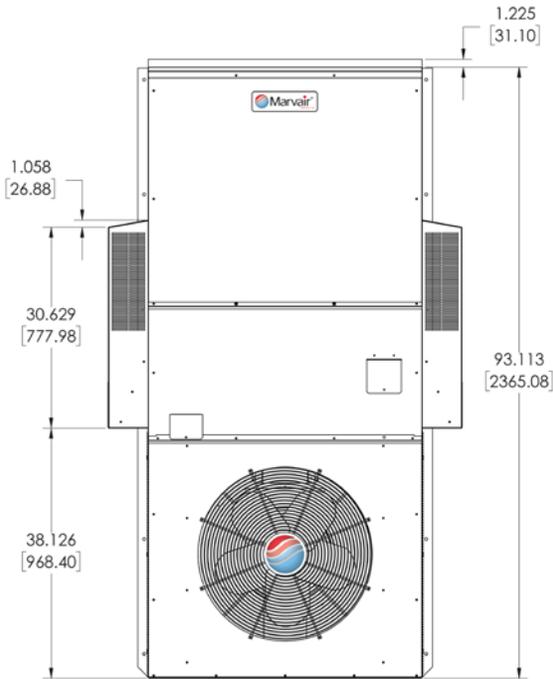


FRONT VIEW

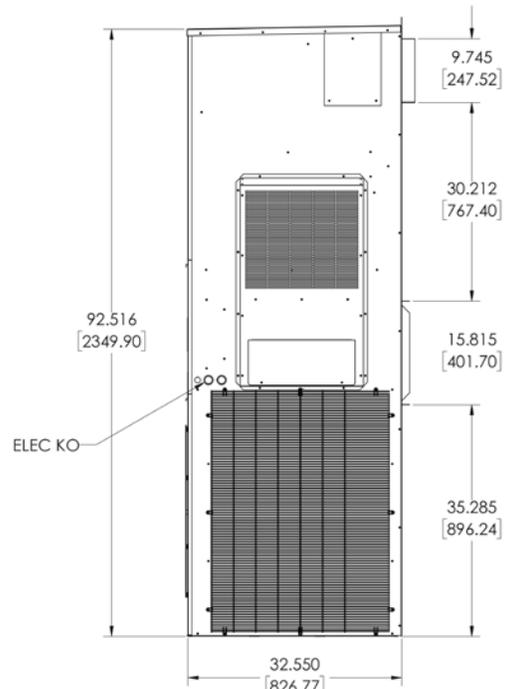

RIGHT VIEW

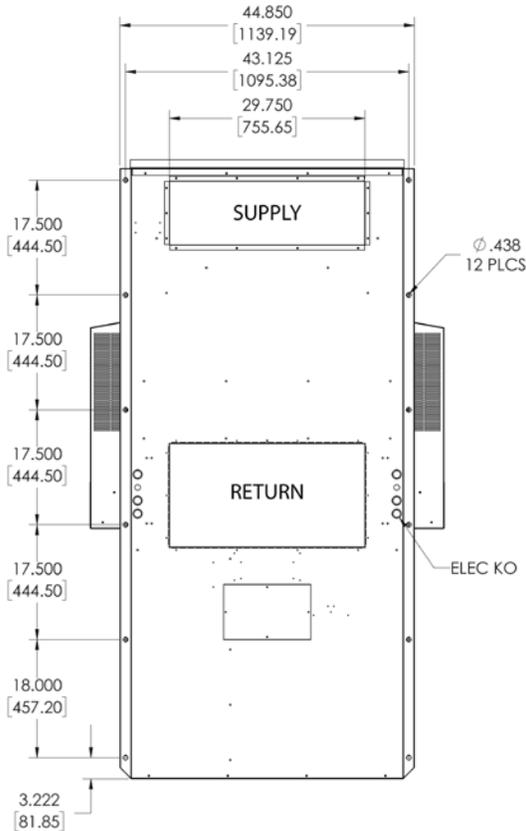

REAR VIEW

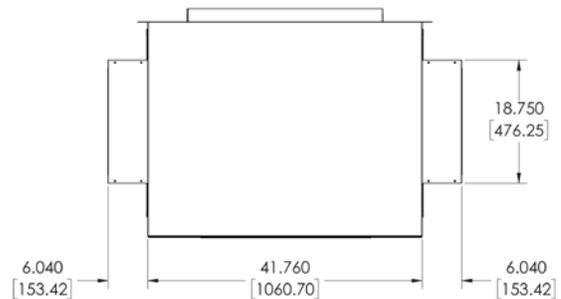

TOP VIEW



Shipping Weight (lbs/kgs)

MAA2072A	LBS/KGS
With Economizer	740/336

Filter Size

MAA2072A	INCHES	MILLIMETERS	PART NUMBER	FILTERS/UNIT	MERV RATING
RETURN AIR FILTER	18 x 30 x 2	457 x 762 x 52	93184	2	8

Dimensional Data - MGA1072A

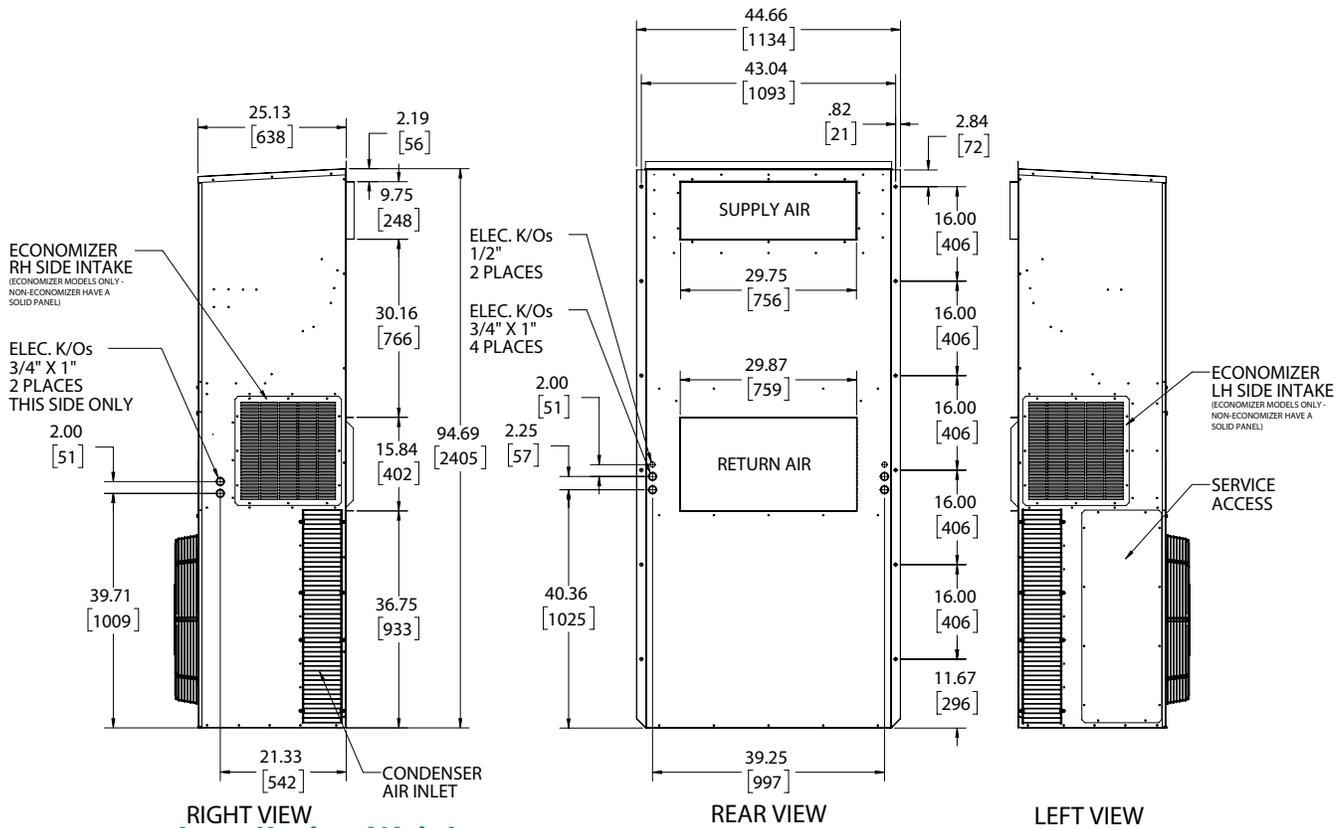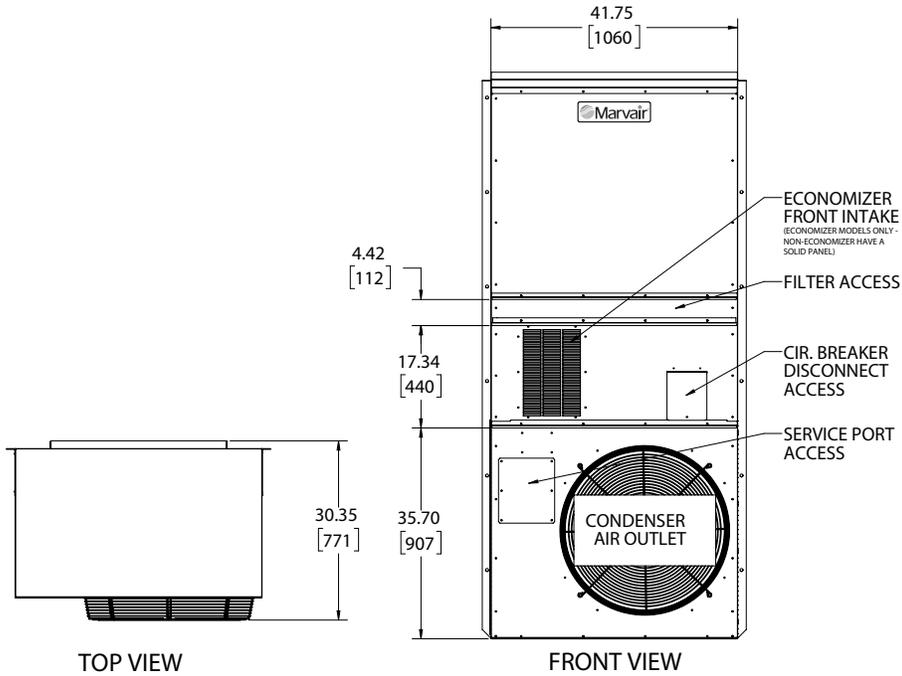


Installation Weight

MGA1072A	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	583	606	636	659
Kilograms	264	275	288	299

Filter Size

MGA1072A	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	24 x 30 x 2	610 x 762 x 51	93587	1	8

Dimensional Data - MAA2060A, MGA1072A & MGA2072A Reverse Flow

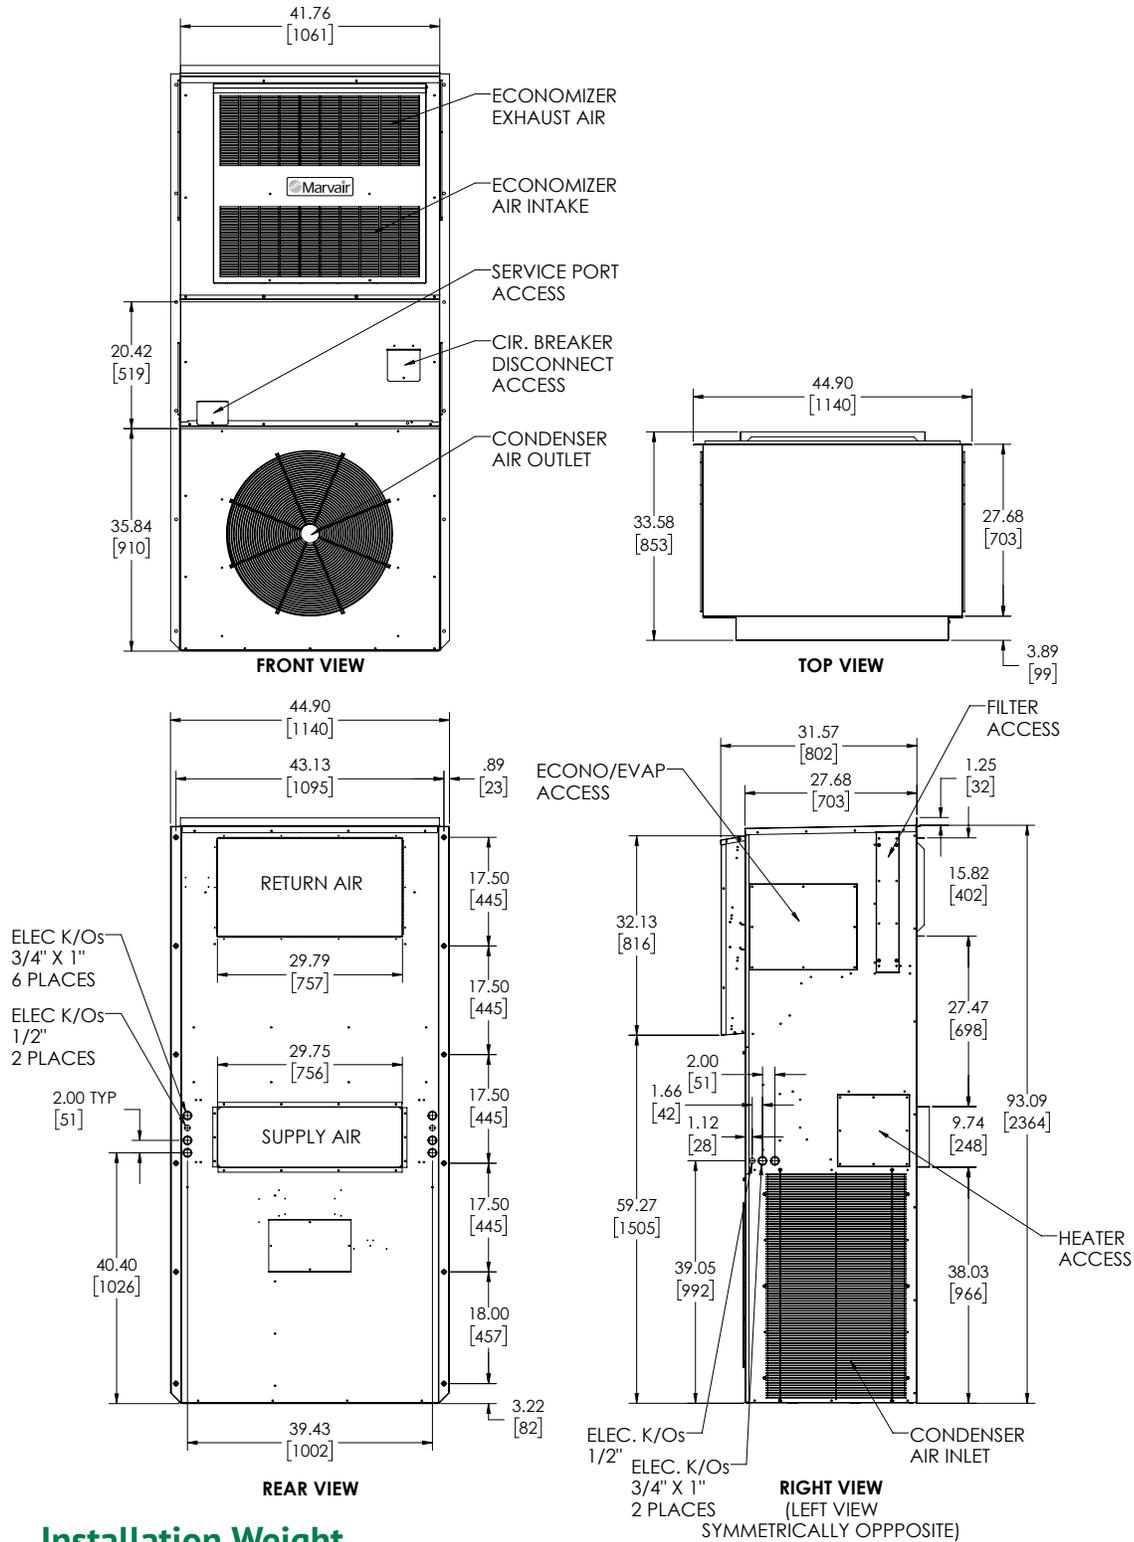

Installation Weight

MAA2060A, MGA1072A & MGA2072A Reverse Flow	Base	w/Economizer	w/3 Phase	w/Economizer & 3 Phase
Pounds	682	705	735	758
Kilograms	309	321	333	344

Filter Size

MAA2060A, MGA1072A & MGA2072A Reverse Flow	INCHES	MILLIMETERS	PART NUMBER	FILTERS PER UNIT	MERV RATING
RETURN AIR FILTER	20 x 22 x 2	508 x 559 x 51	93275	1	8

Notes



Please consult the Marvair® website at www.marvair.com for the latest product literature. Detailed dimensional data is available upon request. A complete warranty statement can be found in each product's Installation/Operation Manual, on our website or by contacting Marvair at 229-273-3636. As part of the Marvair continuous improvement program, specifications are subject to change without notice.



P.O. Box 400 • Cordele, GA 31010
156 Seedling Drive • Cordele, GA 31015
Ph: 229-273-3636 • Fax: 229-273-5154
Email: marvair@airxcs.com • Internet: www.marvair.com

